

OIKO PRO

Focus of Attention

OIKO PRO CATALOGUE 2022

ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated.
All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at



YOUR PROJECT MAKES YOUR PRODUCT



OIKO PRO

8-17 OIKO PRO | OVERVIEW

18-31 OIKO PRO | OPTICS

32-43 OIKO PRO ROUND

44-53 OIKO PRO ADJUSTABLE

54-63 OIKO PRO SQUARE

64-69 OIKO PRO SQUARE COMFORT

70-79 OIKO PRO IN

80-85 OIKO PRO | MAKE IT YOURS

86-97 OIKO PRO











2 SHAPES

ROUND SQUARE

OIKO PRO is available in two geometric forms, ROUND and SQUARE, in order to apprehend characteristics of the interior design of a space and create a coherent atmosphere. The standard cut-out of 68 mm is not affected by the form you choose.

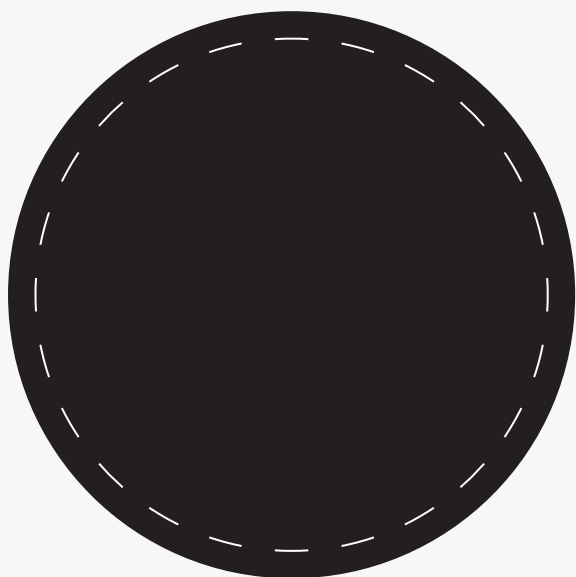

SCALE 1:1
 Ø 75 mm |  68 mm

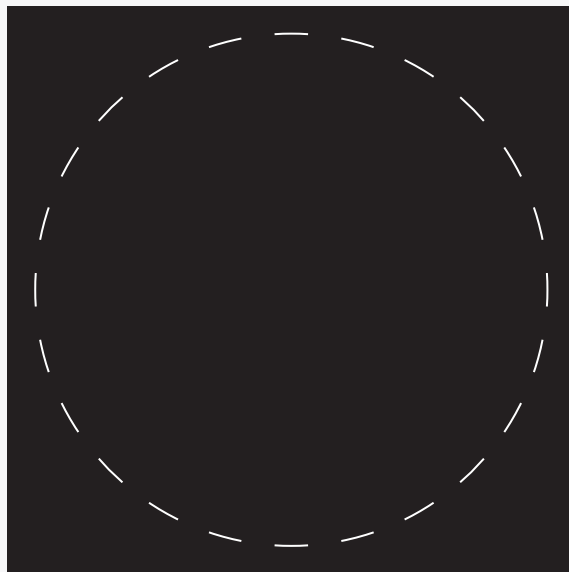

SCALE 1:1
 75 x 75 mm |  68 mm

OIKO PRO OVERVIEW



RECESSED



OIKO PRO ROUND



OIKO PRO ADJUSTABLE




TRIMLESS



OIKO PRO ROUND



OIKO PRO ADJUSTABLE



CONCRETE



OIKO PRO ROUND



OIKO PRO ADJUSTABLE



TRACK



OIKO PRO IN



OIKO PRO SQUARE



OIKO PRO COMFORT



OIKO PRO COMFORT ASYM.



OIKO PRO COMFORT



OIKO PRO SQUARE

OIKO PRO offers a mounting-option for every ceiling situation. Its appearance stays consistent throughout the range and enables a holistic design scheme for spaces with varying requirements.

Simplicity is the secret of OIKO PRO. Its clever design makes it easy to use in all conditions, impeccable in its performance and transversal to any application. The OIKO PRO's appearance is minimalistic, consistent among all the available shapes and thus disappearing in the architecture: the only thing you will notice is its perfect light emission.

OIKO PRO OVERVIEW

1 CUTOUT



2 SHAPES



ROUND



SQUARE

2 OPTIONS



FIXED



ADJUSTABLE

3 MOUNTING OPTIONS



RECESSED



TRIMLESS



CONCRETE

5 OPTICS



WALLWASH



SPOT 15°



MEDIUM 34°



WIDE FLOOD 52°



VERY WIDE FLOOD 68°

LENS PACK



SPREAD LENS




SPREAD LENS LINEAR



HONEY COMB

PERFORMANCE

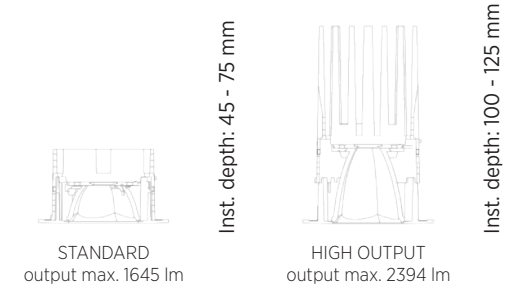


CEILING



IP INTERNAL PROTECTION

IP20 + IP54

COLOR TEMPERATURE CCT

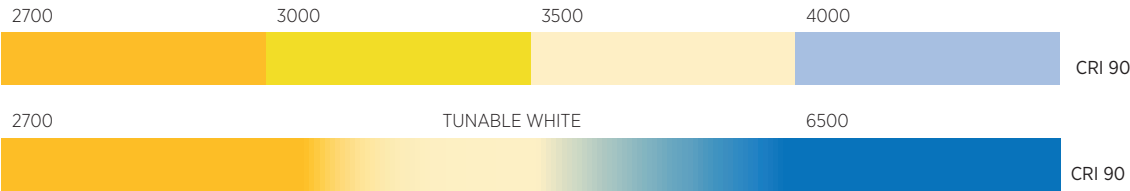

RAL Classic or any other special color on request







ONE SIZE INFINITE APPLICATIONS

The OIKO PRO's housing is specifically designed for a simple installation, with a standard Ø 68 mm cut-out offering a consistent visual appearance for a variety of functions.

STATE OF THE ART OPTICS TECHNOLOGY

The most advanced optics used in all OIKO PRO luminaires offer the purest beam angles. The result is holistic light control without any secondary light beams and perfect light distribution even for the Tunable White LED source. Beam angles of 15°, 34°, 52°, 68° and a WALLWASH version are available and guarantee the same light quality throughout the range.

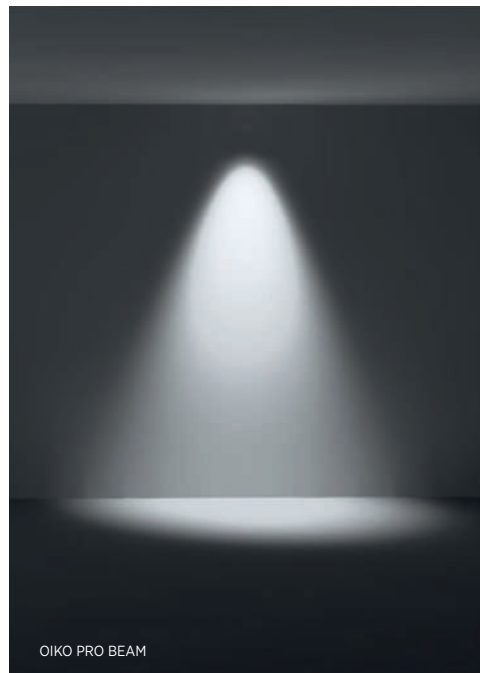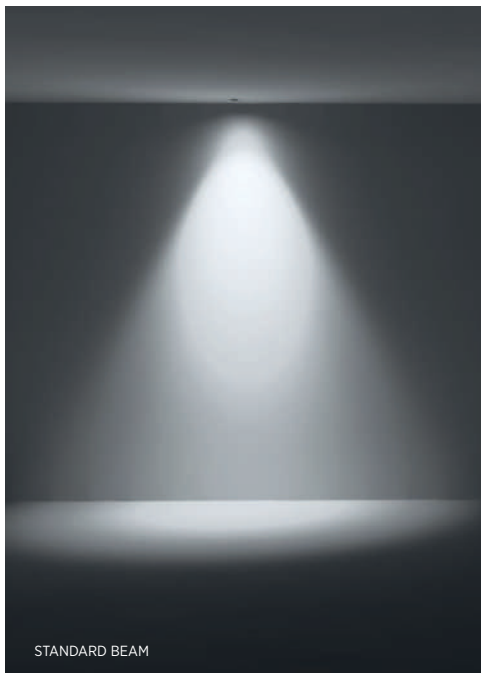

The optics integrated in the OIKO PRO focus the light emission in a single beam and thus offer a precise and sharp light cone without any diffusion. Additional shielding is not required.



PREMIUM DOWNLIGHT OPTICS



SPOT 15°

The impeccable narrow beam is ideal to stress a detail in the interior design, even from double height ceilings.




**MEDIUM 34°**



The solution to create contrast, to play with the light, build spaces and drama in the scene.

**WIDE FLOOD 52°**

Precise and multifunctional - the perfect choice for homogeneity and for multiple applications as a grid in bigger spaces.



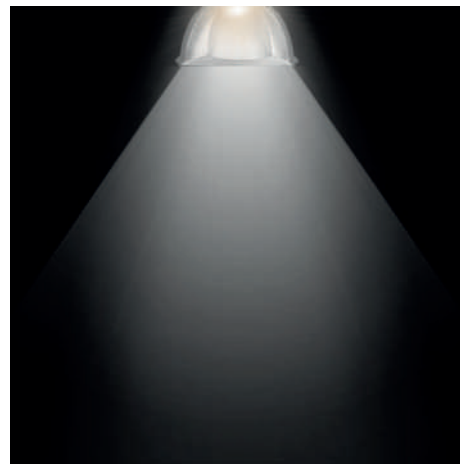
**VERY WIDE FLOOD 68°**

Incredibly wide distribution in compact dimension, yet efficient and comfortable. The ideal solution to light an entire room from one single point or to optimize the general lighting grid with a minimum amount of downlights.

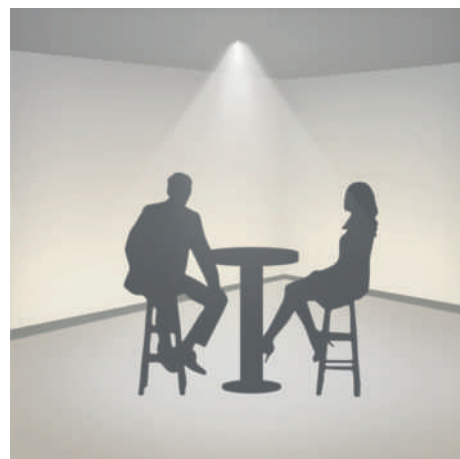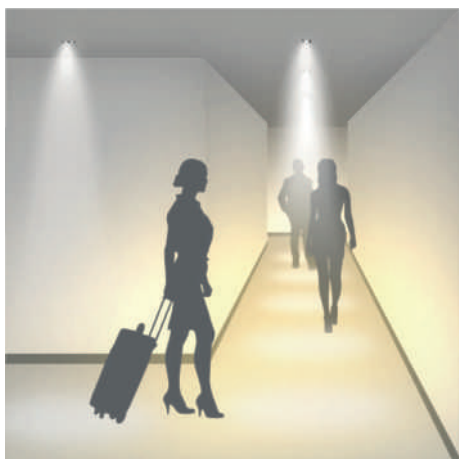

DUAL WALLWASH FUNCTION

The OIKO PRO features unique optics, capable of perfectly illuminating a vertical surface while serving as a downlight at the same time.OIKO PRO is the perfect tool for lighting designers.

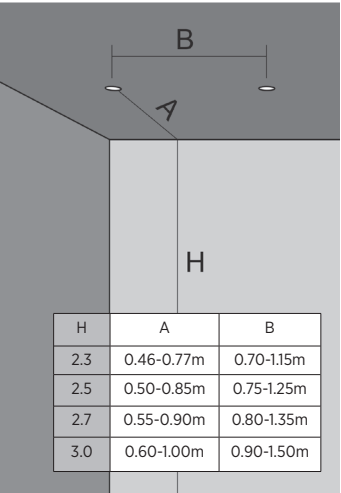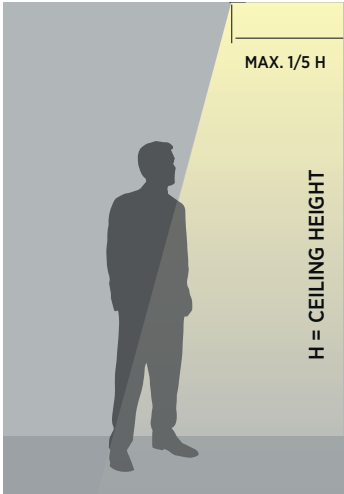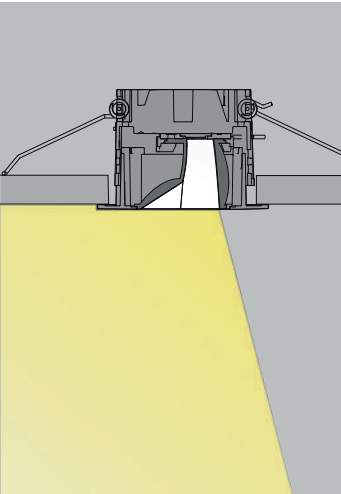

H	A	B
2.3	0.46-0.77m	0.70-1.15m
2.5	0.50-0.85m	0.75-1.25m
2.7	0.55-0.90m	0.80-1.35m
3.0	0.60-1.00m	0.90-1.50m

RECOMMENDED WALLWASH DISTANCES



SPOT 15° FUNCTION




The OIKO PRO ROUND SPOT combines the familiar OIKO appearance with a different kind of lighting technology. Its tube is finished in black to make the spot disappear in the architecture and guarantee perfectly glare-free lighting up to 1200 lumen.





TUNABLE WHITE

The optics can be equipped with 2700K, 3000K, 3500K, 4000K or with an innovative Tunable White function that covers a range from 2700K to 6500K. In order to design unique light scenes, you have the complete freedom to combine modules with different light temperatures. These can be operated by using a simple control system.

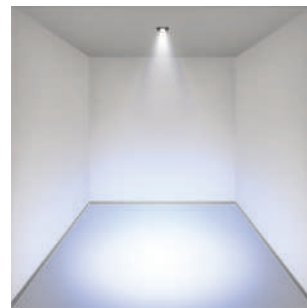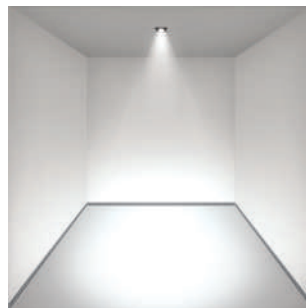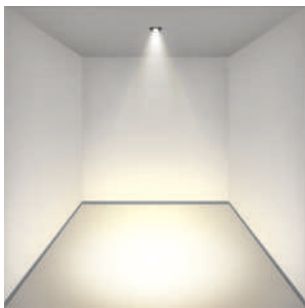



A SOLUTION FOR EVERY ENVIRONMENT: IP20 + IP54

All fixed versions of the OIKO PRO, including the Wallwash optics and the Tunable White version, are also available in an IP54 adaptation, suitable for installations in wet zones.






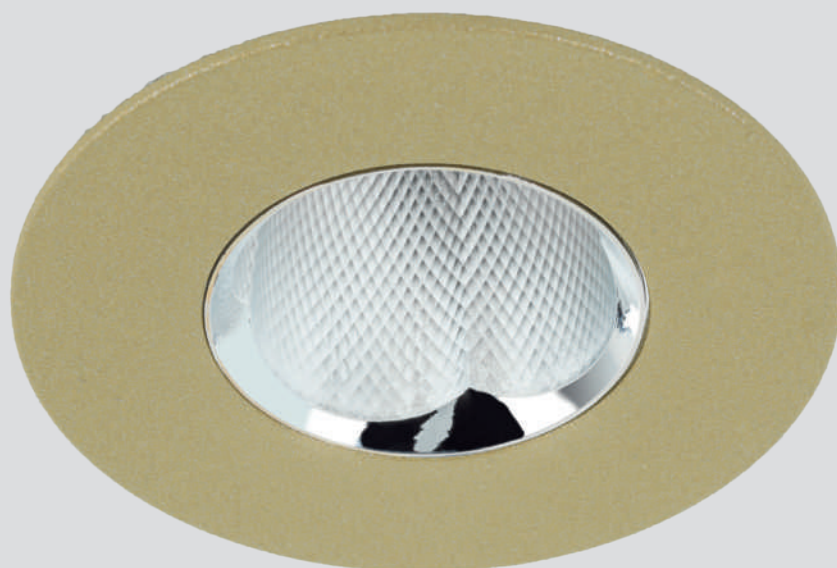


PHOTO | ARMIN KUPRIAN

OIKO PRO ROUND | COLOR 26, CHAMPAGNE CREAM


OIKO PRO ROUND



OIKO PRO ROUND
TRIMLESS

ART.-N° 120-0472

86 mm | Ø 75 mm | Installation depth: 70 mm



OIKO PRO ROUND
RECESSED

ART.-N° 220-0832

68 mm | Ø 75 mm | Installation depth: 70 mm

LUMEN MAX.

1645 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request






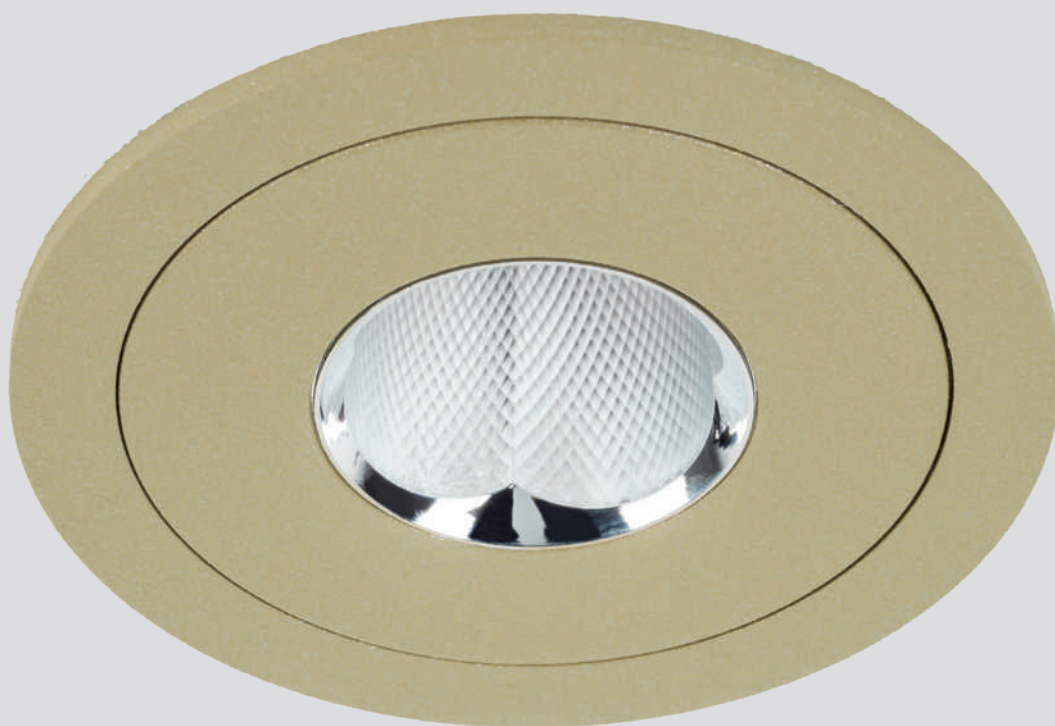


PHOTO | ARMIN KUPRIAN

OIKO PRO ROUND | COLOR 26, CHAMPAGNE CREAM

OIKO PRO ROUND CONCRETE



OIKO PRO ROUND CONCRETE

ART.-N° 220-0852

68 mm | Ø 95 mm | Installation depth: 70 mm

LUMEN MAX.

1455 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request






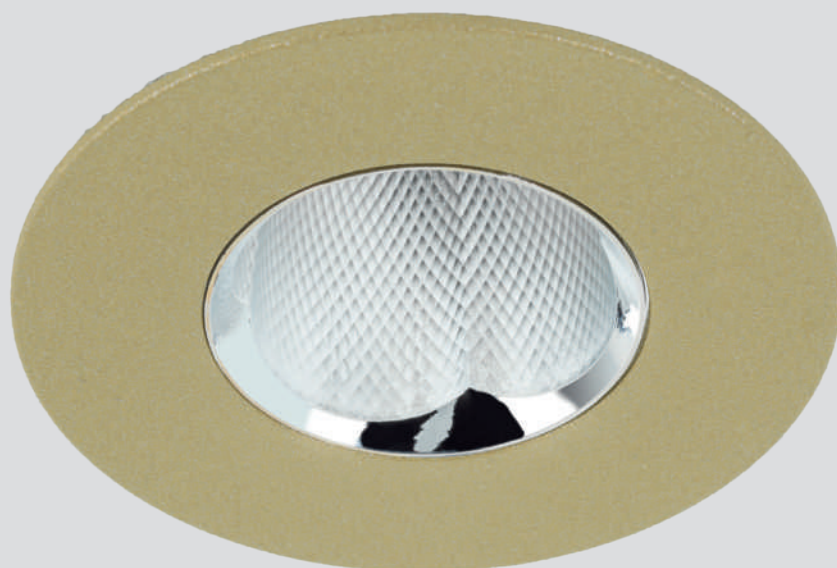


PHOTO | ARMIN KUPRIAN

OIKO PRO ROUND | COLOR 26, CHAMPAGNE CREAM


OIKO PRO ROUND HIGH OUTPUT

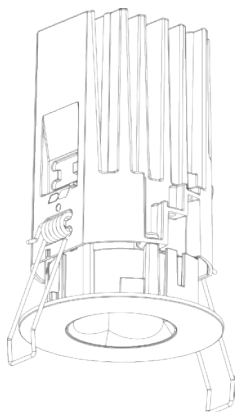

OIKO PRO ROUND HIGH OUTPUT
RECESSED

ART.-N° 220-0982

68 mm | Ø 75 mm | Installation depth: 120 mm

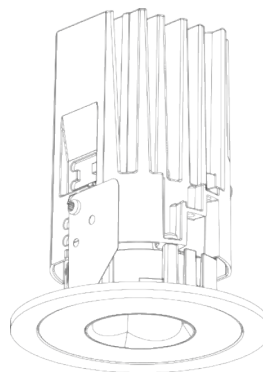

OIKO PRO ROUND HIGH OUTPUT
CONCRETE

ART.-N° 220-1002

68 mm | Ø 95 mm | Installation depth: 120 mm

LUMEN MAX.

2118 lm

WATT

24.2 W

CCT

2700

3000

3500

4000

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request



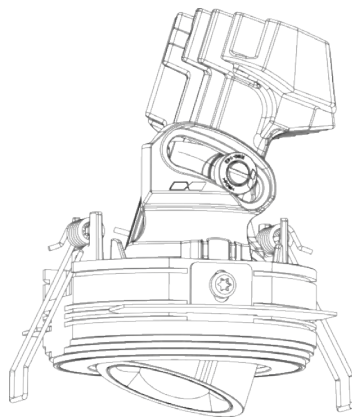




PHOTO | ARMIN KUPRIAN

OIKO PRO ADJUSTABLE | COLOR 03, CRYSTAL WHITE


OIKO PRO ADJUSTABLE



OIKO PRO ADJUSTABLE
TRIMLESS

ART.-N° 120-0502

86 mm | Ø 75 mm | Installation depth: 125 mm

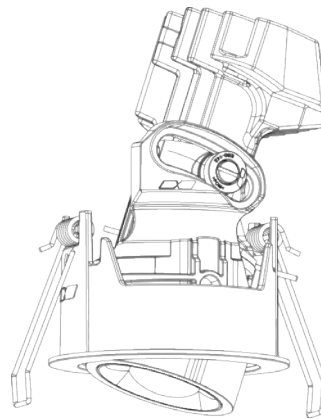

OIKO PRO ADJUSTABLE
RECESSED

ART.-N° 220-1112

68 mm | Ø 75 mm | Installation depth: 125 mm

LUMEN MAX.

1545 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request

OIKO PRO ADJUSTABLE

OIKO PRO ADJUSTABLE The new variant of the OIKO PRO delivers light exactly where it is needed. The mechanism is easy to use and needs no tools to be adjusted.

This is enabled by an almost invisible notch on the spotlight - create the light setting you need for your space in the easiest way. Swiveling from 0° - 25° and a rotation from 0° - 355° is possible. When the luminaire is tilted, no secondary light falls on the casing which avoids disturbing reflections.







OIKO PRO ADJUSTABLE | COLOR 25, GUN METAL

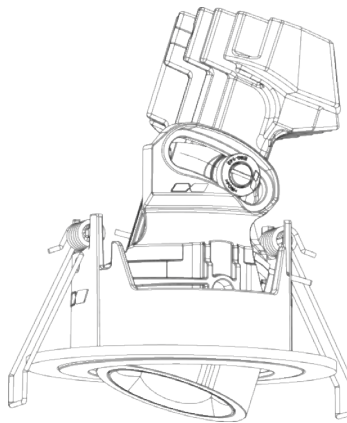




PHOTO | ARMIN KUPRIAN

OIKO PRO ADJUSTABLE CONCRETE | COLOR 25, GUN METAL

OIKO PRO ADJUSTABLE CONCRETE



OIKO PRO ADJUSTABLE CONCRETE

ART.-N° 220-1122

86 mm | Ø 95 mm | Installation depth: 125 mm

LUMEN MAX.

1455 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request

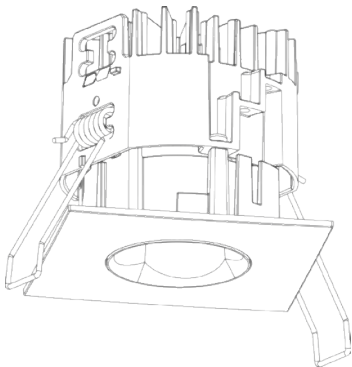






PHOTO | ARMIN KUPRIAN

OIKO PRO SQUARE



OIKO PRO SQUARE
RECESSED

ART.-N° 220-0882

68 mm | 75 x 75 mm | Installation depth: 70 mm

LUMEN MAX.

1455 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request








INSPIRATION | AUREL PETIC

OIKO PRO SQUARE CONCRETE | COLOR 03, CRYSTAL WHITE

OIKO PRO SQUARE CONCRETE

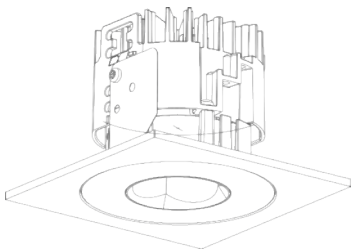

OIKO PRO SQUARE
CONCRETE

ART.-N° 220-0902

68 mm | 95 x 95 mm | Installation depth: 70 mm

LUMEN MAX.

1455 lm

WATT

15 W

CCT

2700 3000 3500 4000

TUNABLE WHITE

2700 - 6500

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request

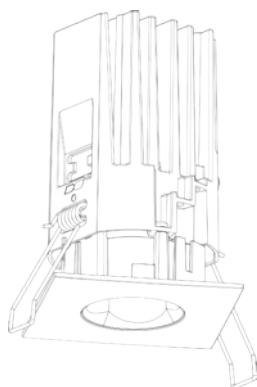






PHOTO | ARMIN KUPRIAN


OIKO PRO SQUARE HIGH OUTPUT



OIKO PRO SQUARE HIGH OUTPUT
RECESSED

ART.-N° 220-1022

68 mm | 75 x 75 mm | Installation depth: 120 mm

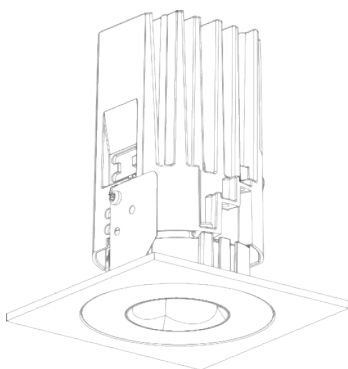

OIKO PRO SQUARE HIGH OUTPUT
CONCRETE

ART.-N° 220-1042

68 mm | 95 x 95 mm | Installation depth: 120 mm

LUMEN MAX.

2118 lm

WATT

15 W

CCT

2700

3000

3500

4000

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS




RAL Classic or any other special color on request



PHOTO | ARMIN KUPRIAN

OIKO PRO SQUARE COMFORT | COLOR 03, CRYSTAL WHITE


OIKO PRO SQUARE COMFORT



OIKO PRO SQUARE COMFORT
TRIMLESS

ART.-N° 120-0523


85 x 85 mm | 74 x 74 mm | Installation depth: 110 mm



OIKO PRO SQUARE COMFORT
RECESSED

ART.-N° 220-1143

85 x 85 mm | 92 x 92 mm | Installation depth: 110 mm

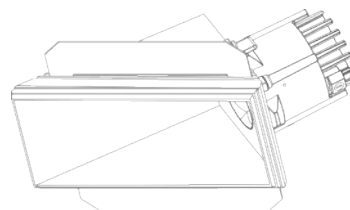

OIKO PRO SQUARE COMFORT ASYMMETRISCH
TRIMLESS

ART.-N° 120-0533

85 x 85 mm | 140 x 70 mm | Installation depth: 105 mm

LUMEN MAX.

1582 lm

WATT

15 W

CCT

2700 K 3000 K 3500 K 4000 K

BEAMWIDTH



VERY WIDE
FLOOD

25 PROLICHT COLORS

LUMEN MAX.

1497 lm

WATT

15 W

CCT

2700 K 3000 K 3500 K 4000 K

BEAMWIDTH



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request



CREATIVE ACCENTS


OIKO PRO SQUARE COMFORT is designed to create colorful accents in ceilings without disturbing the atmosphere. Its casing can be individualized in the 25 PROLICHT colors and is discreetly illuminated by the emitted light.



OIKO PRO COMFORT | RECESSED



OIKO PRO COMFORT | TRIMLESS

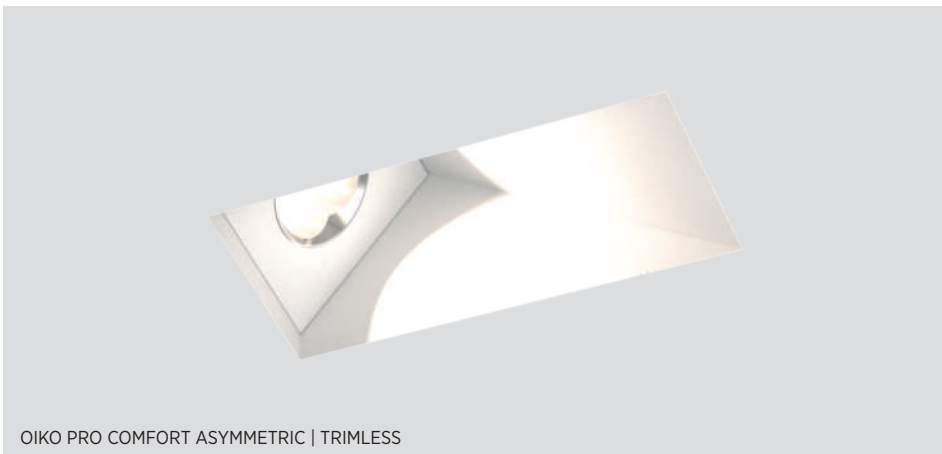

OIKO PRO COMFORT ASYMMETRIC | TRIMLESS



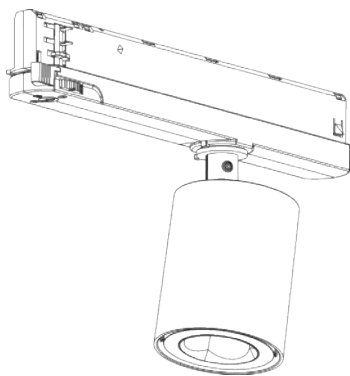




PHOTO | ARMIN KUPRIAN

OIKO PRO IN | COLOR 02, BLACK VELVET

OIKO PRO IN




OIKO PRO IN

ART.-N° 330-1442

Ø 65 mm

LUMEN MAX.
1932 lm

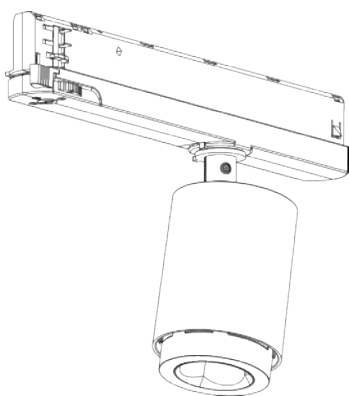

OIKO PRO IN
MEDIUM 34°

ART.-N° 220-1412

Ø 65 mm

LUMEN MAX.
1603 lm

WATT

15 W

CCT

2700

3000

3500

4000



0-355°



25°

COLOR RENDERING INDEX CRI

CRI 90

BEAMWIDTH



WALLWASH



SPOT



MEDIUM



WIDE
FLOOD



VERY WIDE
FLOOD

25 PROLICHT COLORS



RAL Classic or any other special color on request



OIKO PRO IN is completely finished in the color you chose for your luminaire - every detail fits the overall color scheme and can be individualized in the 25 PROLICHT colors.





In order to integrate the track spots perfectly in the interior concept, the adapter for 3-phase-tracks is also available in white for light backgrounds.





SHOE PER
since











WWW.PROLICHT.AT

CONFIGURATION MAKES A DIFFERENCE

Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.



MAKE IT YOURS!

CONFIGURE ONLINE:
WWW.PROLICHT.AT/OIKO





RAL Classic or any other special color on request



COLOR
MAKES A
DIFFERENCE

	01 SPARKLING SILVER				
03 CRYSTAL WHITE			04 CREAMY		
		05 HAMPTON BAY			
			07 URBAN FOREST		08 IN THE ARMY
	09 RUSTY ANGEL				
		12 FADE TO GREY			
	13 MYSTERIOUS GREY				



OIKO PRO



BEAMWIDTH | LEGEND

Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	M	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°




POWER

14.4 - 24.2 WATT


IP International Protection

IP20 + IP54

INSTALLATION

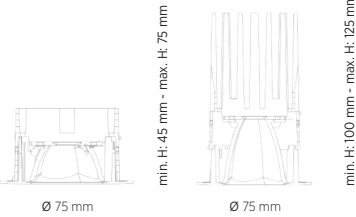

COLOR TEMPERATURE CCT

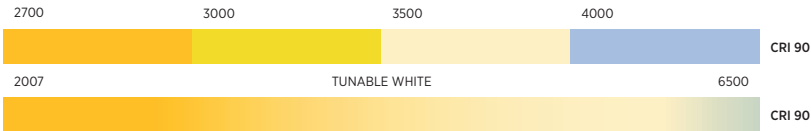

BEAMWIDTH




LENS PACK



COLOR




RAL Classic or any other color on request




TRIMLESS

Ø 75 mm | 86 mm



RECESSED

Ø 75 mm | 68 mm



CONCRETE

Ø 95 mm | 68 mm

OIKO PRO ROUND

CCT				LUMEN MAX.	BEAM ANGLE		IP	INSTALL. DEPTH MIN.	ART.-N° TRIMLESS	ART.-N° RECESSED	ART.-N° CONCRETE
2700	3000	3500	4000	1462	WALLWASH		IP20	55	120-0470	220-0830	220-0850
2700	3000	3500	4000	1220	SPOT	15°	IP20	70	120-0471	220-0831	220-0851
2700	3000	3500	4000	1455	MEDIUM	34°	IP20	70	120-0472	220-0832	220-0852
2700	3000	3500	4000	1545	WIDE FLOOD	52°	IP20	55	120-0473	220-0833	220-0853
2700	3000	3500	4000	1645	VERY WIDE FLOOD	68°	IP20	45	120-0474	220-0834	220-0854
TUNABLE WHITE 2700 - 6500				1216	WALLWASH		IP20	55	120-0475	220-0835	220-0855
TUNABLE WHITE 2700 - 6500				1129	MEDIUM	34°	IP20	70	120-0477	220-0837	220-0857
TUNABLE WHITE 2700 - 6500				1240	WIDE FLOOD	52°	IP20	55	120-0478	220-0838	220-0858
TUNABLE WHITE 2700 - 6500				1381	VERY WIDE FLOOD	68°	IP20	45	120-0479	220-0839	220-0859
2700	3000	3500	4000	1400	WALLWASH		IP54	60	●	220-0840	220-0860
2700	3000	3500	4000	1170	SPOT	15°	IP54	75	●	220-0841	220-0861
2700	3000	3500	4000	1408	MEDIUM	34°	IP54	75	●	220-0842	220-0862
2700	3000	3500	4000	1471	WIDE FLOOD	52°	IP54	60	●	220-0843	220-0863
2700	3000	3500	4000	1501	VERY WIDE FLOOD	68°	IP54	50	●	220-0844	220-0864
TUNABLE WHITE 2700 - 6500				1159	WALLWASH		IP54	60	●	220-0845	220-0865
TUNABLE WHITE 2700 - 6500				1116	MEDIUM	34°	IP54	75	●	220-0847	220-0867
TUNABLE WHITE 2700 - 6500				1176	WIDE FLOOD	52°	IP54	60	●	220-0848	220-0868
TUNABLE WHITE 2700 - 6500				1319	VERY WIDE FLOOD	68°	IP54	50	●	220-0849	220-0869

OIKO PRO ROUND | HIGH OUTPUT

CCT				LUMEN MAX.	BEAM ANGLE						
2700	3000	3500	4000	2128	WALLWASH		IP20	105	●	220-0980	220-1000
2700	3000	3500	4000	1461	SPOT	15°	IP20	120	●	220-0981	220-1001
2700	3000	3500	4000	2118	MEDIUM	34°	IP20	120	●	220-0982	220-1002
2700	3000	3500	4000	2248	WIDE FLOOD	52°	IP20	105	●	220-0983	220-1003
2700	3000	3500	4000	2394	VERY WIDE FLOOD	68°	IP20	100	●	220-0984	220-1004
2700	3000	3500	4000	2038	WALLWASH		IP54	110	●	220-0990	220-1010
2700	3000	3500	4000	1388	SPOT	15°	IP54	125	●	220-0991	220-1011
2700	3000	3500	4000	2049	MEDIUM	34°	IP54	125	●	220-0992	220-1012
2700	3000	3500	4000	2141	WIDE FLOOD	52°	IP54	110	●	220-0993	220-1013
2700	3000	3500	4000	2272	VERY WIDE FLOOD	68°	IP54	100	●	220-0994	220-1014


POSSIBLE CONTROLS



CASAMBI PUSH DIM

1-10V

OTHER ACCESSORIES ON WWW.PROLICHT.AT/OIKO

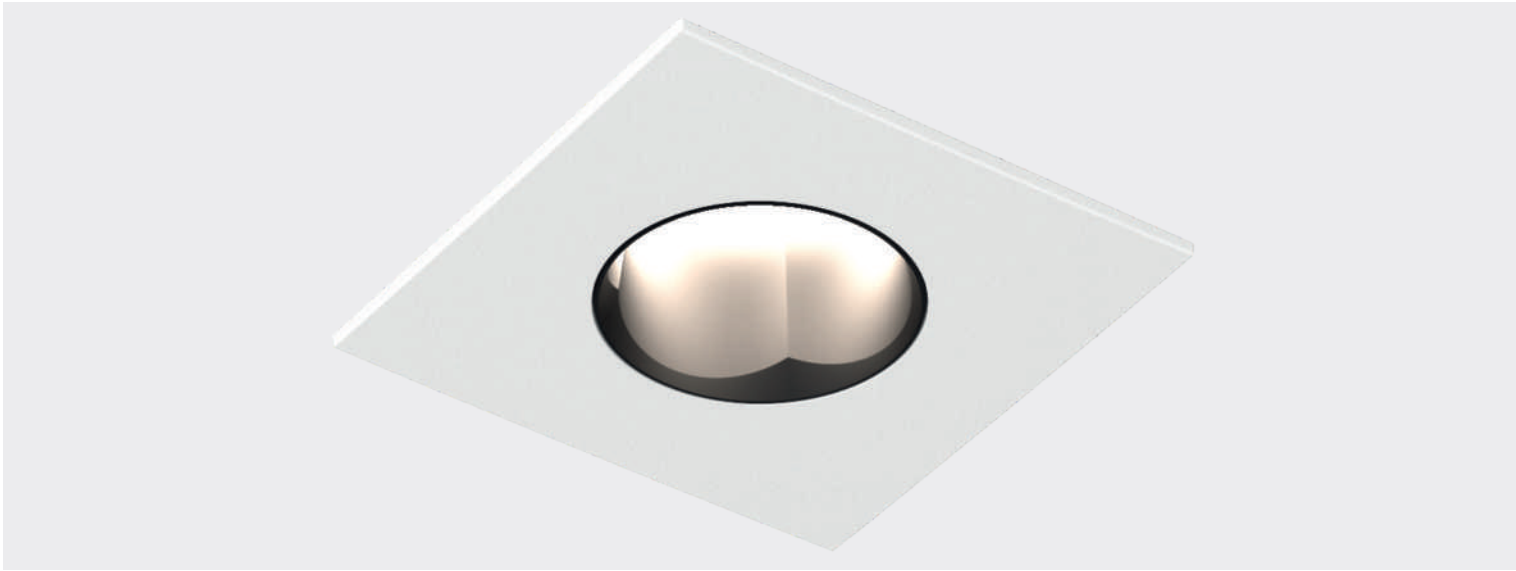


POWER

14.4 - 24.2 WATT


IP International Protection

IP20 + IP54

INSTALLATION

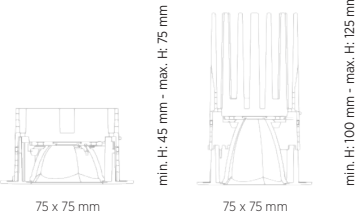

COLOR TEMPERATURE CCT

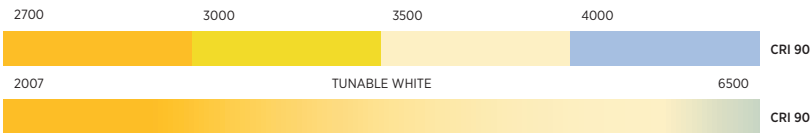

BEAMWIDTH




LENS PACK



COLOR




RAL Classic or any other color on request



RECESSED

75 x 75 mm | 68 mm



CONCRETE

95 x 95 mm | 86 mm

OIKO PRO SQUARE

CCT				LUMEN MAX.	BEAM ANGLE		IP	INSTALL. DEPTH MIN.	ART.-N° TRIMLESS	ART.-N° RECESSED	ART.-N° CONCRETE
2700	3000	3500	4000	1462	WALLWASH		IP20	55	●	220-0880	220-0900
2700	3000	3500	4000	1220	SPOT	15°	IP20	70	●	220-0881	220-0901
2700	3000	3500	4000	1455	MEDIUM	34°	IP20	70	●	220-0882	220-0902
2700	3000	3500	4000	1545	WIDE FLOOD	52°	IP20	55	●	220-0883	220-0903
2700	3000	3500	4000	1645	VERY WIDE FLOOD	68°	IP20	45	●	220-0884	220-0904
TUNABLE WHITE 2700 - 6500				1216	WALLWASH		IP20	55	●	220-0885	220-0905
TUNABLE WHITE 2700 - 6500				1129	MEDIUM	34°	IP20	70	●	220-0887	220-0907
TUNABLE WHITE 2700 - 6500				1240	WIDE FLOOD	52°	IP20	55	●	220-0888	220-0908
TUNABLE WHITE 2700 - 6500				1381	VERY WIDE FLOOD	68°	IP20	45	●	220-0889	220-0909
2700	3000	3500	4000	1400	WALLWASH		IP54	60	●	220-0890	220-0910
2700	3000	3500	4000	1170	SPOT	15°	IP54	75	●	220-0891	220-0911
2700	3000	3500	4000	1408	MEDIUM	34°	IP54	75	●	220-0892	220-0912
2700	3000	3500	4000	1471	WIDE FLOOD	52°	IP54	60	●	220-0893	220-0913
2700	3000	3500	4000	1501	VERY WIDE FLOOD	68°	IP54	50	●	220-0894	220-0914
TUNABLE WHITE 2700 - 6500				1159	WALLWASH		IP54	60	●	220-0895	220-0915
TUNABLE WHITE 2700 - 6500				1116	MEDIUM	34°	IP54	75	●	220-0897	220-0917
TUNABLE WHITE 2700 - 6500				1176	WIDE FLOOD	52°	IP54	60	●	220-0898	220-0918
TUNABLE WHITE 2700 - 6500				1319	VERY WIDE FLOOD	68°	IP54	50	●	220-0899	220-0919

OIKO PRO SQUARE | HIGH OUTPUT

CCT				LUMEN MAX.	BEAM ANGLE						
2700	3000	3500	4000	2128	WALLWASH		IP20	105	●	220-1020	220-1040
2700	3000	3500	4000	1461	SPOT	15°	IP20	120	●	220-1021	220-1041
2700	3000	3500	4000	2118	MEDIUM	34°	IP20	120	●	220-1022	220-1042
2700	3000	3500	4000	2248	WIDE FLOOD	52°	IP20	105	●	220-1023	220-1043
2700	3000	3500	4000	2394	VERY WIDE FLOOD	68°	IP20	100	●	220-1024	220-1044
2700	3000	3500	4000	2038	WALLWASH		IP54	110	●	220-1030	220-1050
2700	3000	3500	4000	1388	SPOT	15°	IP54	125	●	220-1031	220-1051
2700	3000	3500	4000	2049	MEDIUM	34°	IP54	125	●	220-1032	220-1052
2700	3000	3500	4000	2141	WIDE FLOOD	52°	IP54	110	●	220-1033	220-1053
2700	3000	3500	4000	2272	VERY WIDE FLOOD	68°	IP54	100	●	220-1034	220-1054

POSSIBLE CONTROLS



CASAMBI PUSH DIM

1-10V

OTHER ACCESSORIES ON WWW.PROLICHT.AT/OIKO



ADJUSTABILITY



0-355° 25°


POWER

14.4 - 15.5 WATT


IP International Protection

IP20

INSTALLATION

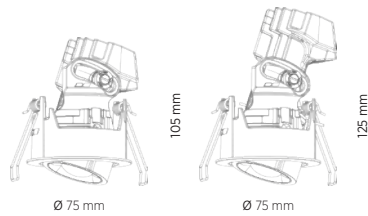

COLOR TEMPERATURE CCT

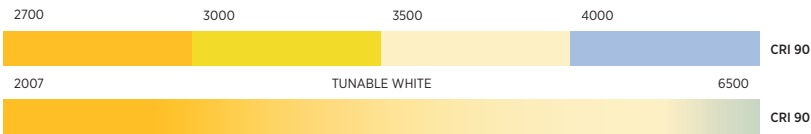

BEAMWIDTH

WALLWASH



SPOT

15°



MEDIUM

34°



WIDE FLOOD

52°



VERY WIDE FLOOD

68°



LENS PACK

SPREAD LENS



SPREAD LENS LINEAR



HONEY COMB




COLOR

25 PROLICHT COLORS




RAL Classic or any other color on request




TRIMLESS

Ø 75 mm | 86 mm



RECESSED

Ø 75 mm | 68 mm



CONCRETE

Ø 95 mm | 86 mm

OIKO PRO ADJUSTABLE

CCT				LUMEN MAX.	BEAM ANGLE		IP	INSTALL. DEPTH MIN.	ART.-N° TRIMLESS	ART.-N° RECESSED	ART.-N° CONCRETE
2700	3000	3500	4000	1220	SPOT	15°	IP20	125	120-0501	220-1111	220-1121
2700	3000	3500	4000	1455	MEDIUM	34°	IP20	125	120-0502	220-1112	220-1122
2700	3000	3500	4000	1455	WIDE FLOOD	52°	IP20	115	120-0503	220-1113	220-1123
2700	3000	3500	4000	1545	VERY WIDE FLOOD	68°	IP20	105	120-0504	220-1114	220-1124
TUNABLE WHITE 2700 - 6500				1129	MEDIUM	34°	IP20	125	120-0507	220-1117	220-1127
TUNABLE WHITE 2700 - 6500				1240	WIDE FLOOD	52°	IP20	115	120-0508	220-1118	220-1128
TUNABLE WHITE 2700 - 6500				1381	VERY WIDE FLOOD	68°	IP20	105	120-0509	220-1119	220-1129

POSSIBLE CONTROLS



CASAMBI PUSH DIM

1-10V

OTHER ACCESSORIES ON WWW.PROLICHT.AT/OIKO




POWER

19.1 -19.9 WATT

IP International Protection

IP20

INSTALLATION

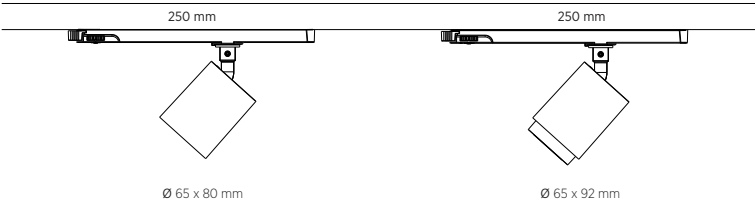

COLOR TEMPERATURE CCT



BEAMWIDTH

WALLWASH



SPOT

15°



MEDIUM

34°



WIDE FLOOD

52°



VERY WIDE FLOOD

68°




COLOR

25 PROLIGHT COLORS




RAL Classic or any other color on request



TRACK

Ø 65 mm | max. 135 mm



TRACK

Ø 65 mm | max. 144 mm

OIKO PRO IN | 3 PHASE TRACK

CCT				LUMEN MAX.	BEAM ANGLE		IP	WATT MAX.	ART-N° ON/OFF	ART-N° DALI	ART-N° CASAMBI
2700	3000	3500	4000	1724	WALLWASH		IP20	19.1	330-1440	330-1442	●
2700	3000	3500	4000	1438	SPOT	15°	IP20	19.1	330-1500	330-1502	●
2700	3000	3500	4000	1603	MEDIUM	34°	IP20	19.1	330-1410	330-1412	●
2700	3000	3500	4000	1759	WIDE FLOOD	52°	IP20	19.1	330-1420	330-1422	●
2700	3000	3500	4000	1932	VERY WIDE FLOOD	68°	IP20	19.1	330-1430	330-1443	●

POSSIBLE CONTROLS

ON/OFF 



OTHER ACCESSORIES ON WWW.PROLICHT.AT/OIKO




POWER

15.5 WATT

IP International Protection

IP20

INSTALLATION

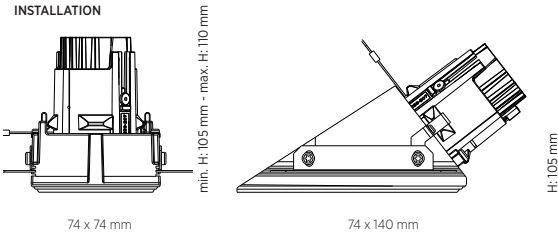

COLOR TEMPERATURE CCT



BEAMWIDTH

VERY WIDE FLOOD
68°




COLOR


25 PROLICHT COLORS




RAL Classic or any other color on request



RECESSED



TRIMLESS



TRIMLESS

OIKO PRO SQUARE COMFORT

DESCRIPTION	CCT				LUMEN MAX.	BEAM ANGLE		IP	INSTALL. DEPTH MIN.	ART.-N° TRIMLESS	ART.-N° RECESSED	ART.-N° CONCRETE
	2700	3000	3500	4000	1582	VERY WIDE FLOOD	68°	IP20	110	120-0523	220-1143	●
ASYMMETRIC	2700	3000	3500	4000	1497	VERY WIDE FLOOD	68°	IP20	105	120-0533	●	●

other optics on request

POSSIBLE CONTROLS

ON/OFF



CASAMBI PUSH DIM

1-10V

OTHER ACCESSORIES ON WWW.PROLICHT.AT/OIKO



DISCOVER MORE ON

WWW.PROLICHT.AT/OIKO







EDITOR	Filippo Bettinzoli, PROLICHT PROLICHT GmbH Austria 6091 Neu-Götzens Gewerbepark 9 T +43 5234 33 499 F + 43 5234 33 499 22 marketing@prolicht.at www.prolicht.at
TECHNICAL SUPPORT	Romain Hoffmann
GRAPHIC DESIGN	Tonia Wiedenmann
TEXT	Julia Kopp, Philipp Juen
PRODUCT PHOTOS	Armin Kuprian, Günther Egger
PRODUCT RENDERINGS	Aurel Petic, viewture.media, MOZING STUDIO
EDITION	Spring 2022



FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT