



CENTRIQ IN

CENTRIQ IN CATALOGUE 2022  
ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated.  
All changes and adaptations that serve to improve our products can be carried out without prior notice.


The latest data sheets can be configured at [www.prolicht.at](http://www.prolicht.at)



YOUR PROJECT MAKES YOUR PRODUCT





# CENTRIQ IN OVERVIEW

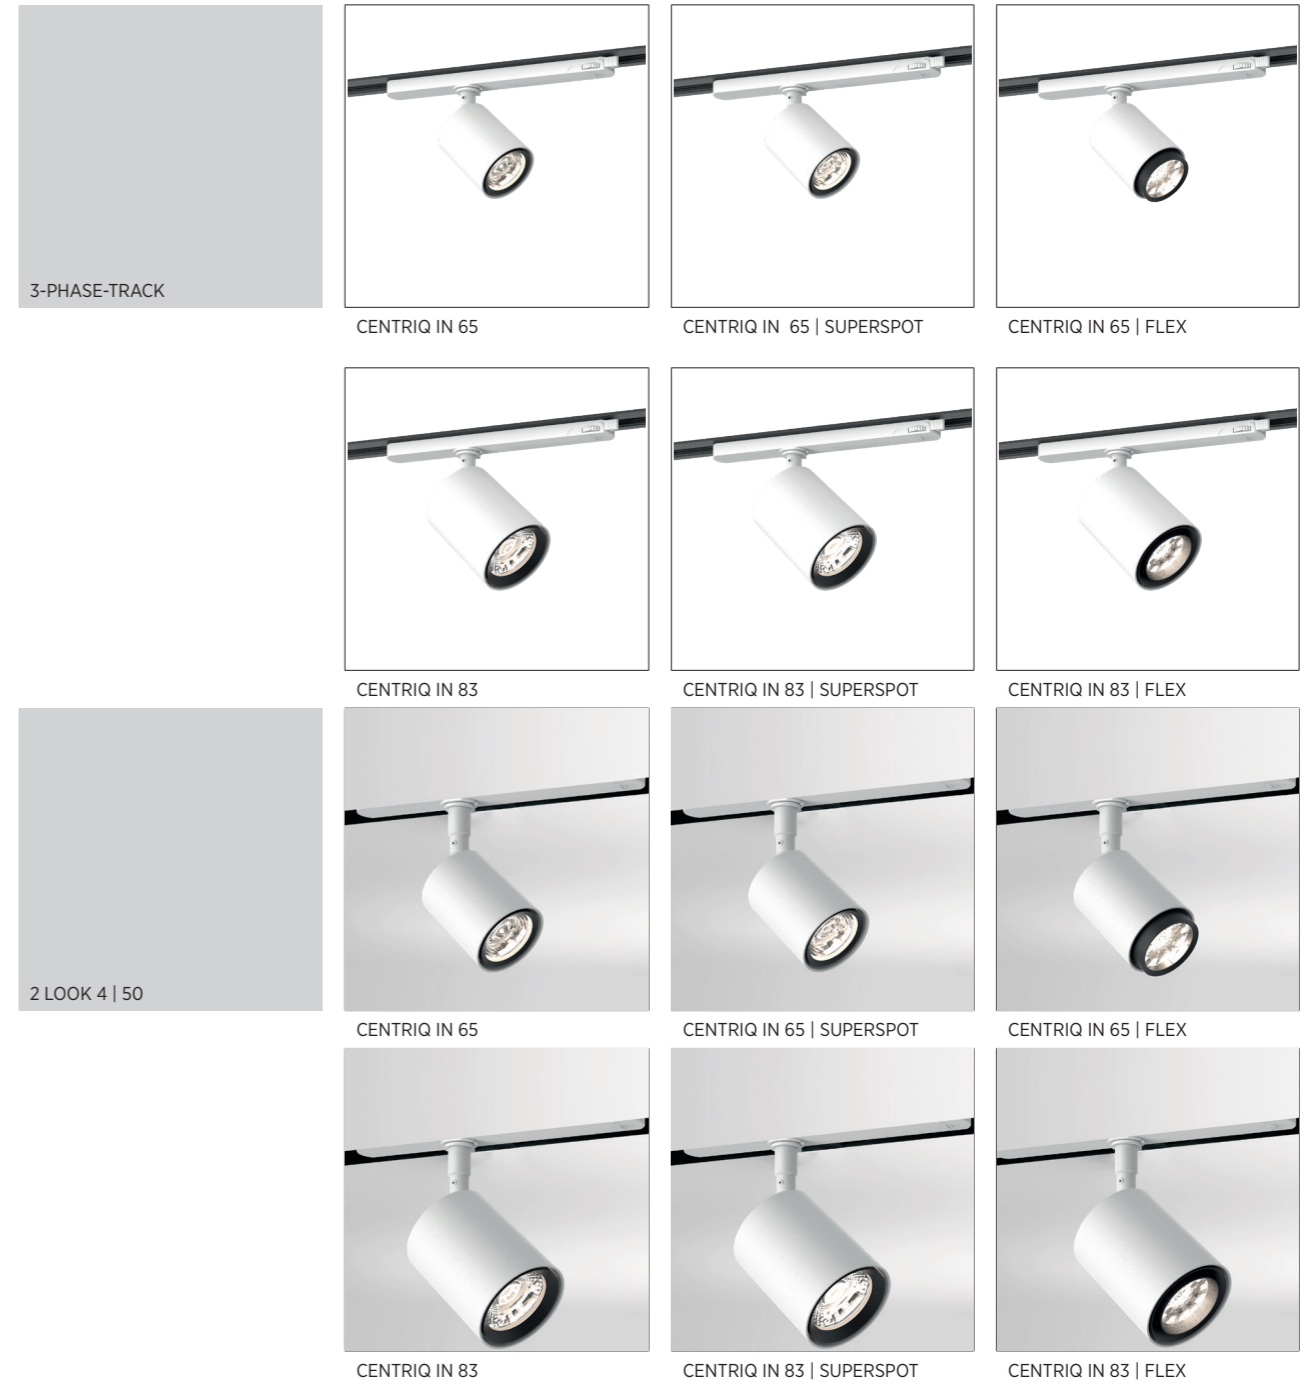



## CENTRIQ IN | 3-PHASE-TRACK

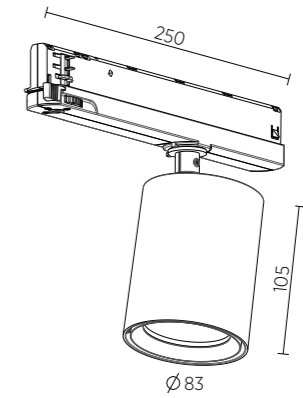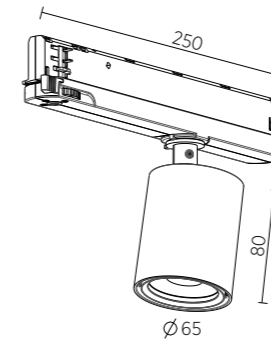

### CENTRIQ IN 65

ON/OFF 330-1380  
DALI 330-1382

Ø 65 mm x 80 mm

LUMEN MAX.

2291 lm

WATT

23 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT  
24°



FLOOD  
36°



WIDE  
FLOOD 52°

25 PROLICHT COLORS

ADAPTER COLOR



### CENTRIQ IN 83

ON/OFF 330-1450  
DALI 330-1452

Ø 83 mm x 105 mm

LUMEN MAX.

3450 lm

WATT

36 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT  
20°



MEDIUM  
32°



WIDE  
FLOOD 54°



25 PROLICHT COLORS

ADAPTER COLOR





## CENTRIQ IN SUPERSPOT | 3-PHASE-TRACK

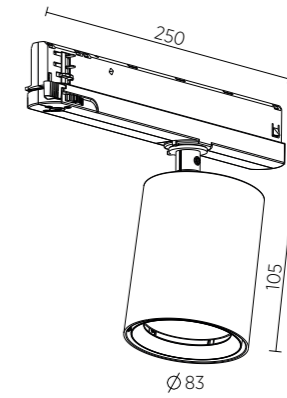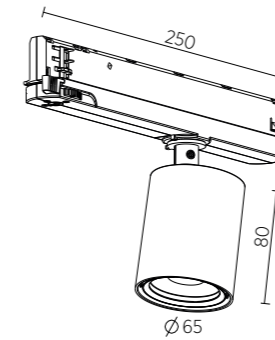

CENTRIQ IN SUPERSPOT 65

ON/OFF 330-1400  
DALI 330-1402

Ø 65 mm x 80 mm

LUMEN MAX.

1557 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SUPERSPOT  
12°

25 PROLICHT COLORS

ADAPTER COLOR



CENTRIQ IN SUPERSPOT 83

ON/OFF 330-1470  
DALI 330-1472

Ø 83 mm x 105 mm

LUMEN MAX.

1843 lm

WATT

27 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SUPERSPOT  
12°


25 PROLICHT COLORS

ADAPTER COLOR





## CENTRIQ IN FLEX | 3-PHASE-TRACK

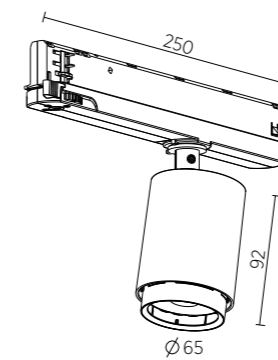

CENTRIQ IN FLEX 65

ON/OFF 330-1390  
DALI 330-1392

Ø 65 mm x 80 mm

LUMEN MAX.

1423 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH




SPOT 14°



WIDE FLOOD 44°

25 PROLICHT COLORS

ADAPTER COLOR

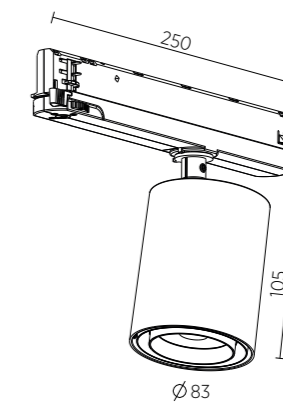

CENTRIQ IN FLEX 83

ON/OFF 330-1460  
DALI 330-1462

Ø 83 mm x 105 mm

LUMEN MAX.

1423 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT 14°



WIDE FLOOD 44°

25 PROLICHT COLORS


ADAPTER COLOR







# CENTRIQ IN | 2LOOK4 50

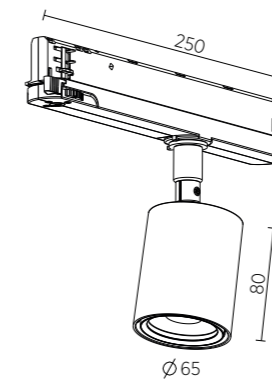

CENTRIQ IN 65

ON/OFF 7-02388-00  
DALI 7-02389-02

Ø 65 mm x 80 mm

LUMEN MAX.

2291 lm

WATT

23 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH




SPOT  
24°

MEDIUM  
36°

WIDE  
FLOOD 52°

25 PROLICHT COLORS

ADAPTER COLOR

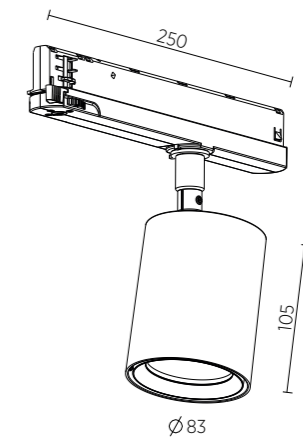

CENTRIQ IN 83

ON/OFF 7-02394-00  
DALI 7-02395-02

Ø 83 mm x 105 mm

LUMEN MAX.

3450 lm

WATT

36 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT  
20°

MEDIUM  
32°

WIDE  
FLOOD 54°


25 PROLICHT COLORS

ADAPTER COLOR





## CENTRIQ IN SUPERSPOT | 2LOOK4 50

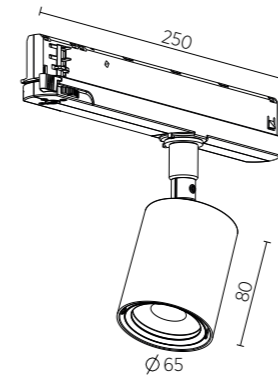

CENTRIQ IN SUPERSPOT 65

ON/OFF 7-02392-00  
DALI 7-02393-02

Ø 65 mm x 80 mm

LUMEN MAX.

1557 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90


BEAMWIDTH



SUPERSPOT  
12°

25 PROLICHT COLORS

ADAPTER COLOR

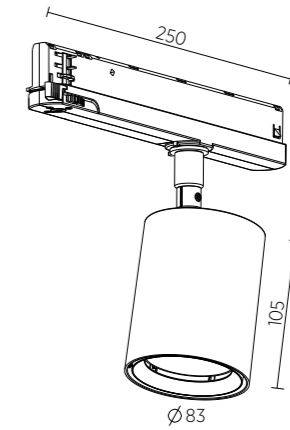

CENTRIQ IN SUPERSPOT 83

ON/OFF 7-02398-00  
DALI 7-02399-02

Ø 83 mm x 105 mm

LUMEN MAX.

1843 lm

WATT

27 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SUPERSPOT  
12°


25 PROLICHT COLORS

ADAPTER COLOR





## CENTRIQ IN FLEX | 2LOOK4 50

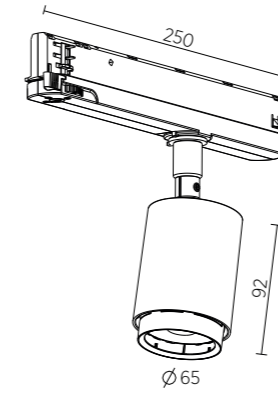

CENTRIQ IN FLEX 65

ON/OFF 7-02390-00  
DALI 7-02391-02

Ø 65 mm x 92 mm

LUMEN MAX.

1423 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT 14°


up to



WIDE FLOOD 44°

25 PROLIGHT COLORS

ADAPTER COLOR

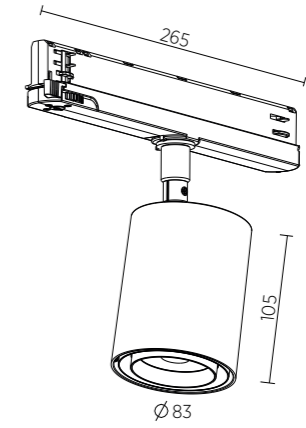

CENTRIQ IN FLEX 83

ON/OFF 7-02397-02  
DALI 7-02396-00

Ø 83 mm x 105 mm

LUMEN MAX.

1423 lm

WATT

21 W

CCT

2700 3000 3500 4000



0-350°



0-90°

CRI 90

BEAMWIDTH



SPOT 14°

up to



WIDE FLOOD 44°

25 PROLIGHT COLORS

ADAPTER COLOR






CENTRIQ IN 3-PHASE-TRACK | COLOR 02, BLACK VELVET , ADAPTER WHITE



CENTRIQ IN 3-PHASE-TRACK | COLOR 03, CRYSTAL WHITE, ADAPTER WHITE

WWW.PROLICHT.AT

# CONFIGURATION MAKES A DIFFERENCE

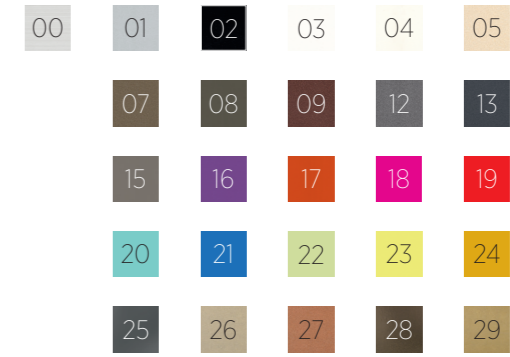

RAL Classic or any other special color on request

Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.




## MAKE IT YOURS!

CONFIGURE ONLINE:  
WWW.PROLICHT.AT/CENTRIQ IN


# CENTRIQ IN

 BEAMWIDTH | LEGEND


Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	M	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°




CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX



CENTRIQ IN 83



CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX

**CENTRIQ IN | 3 PHASE TRACK**

DESCRIPTION	CCT				LUMEN MAX.	WATT	CRI	BEAM ANGLE - OPTIONS				IP	ART-N° ON/OFF	ART-N° DALI
CENTRIQ IN 65	2700	3000	3500	4000	2291	23	90	SPOT 24°	FLOOD 36°	WIDE FLOOD 52°	IP20	330-1380	330-1382	
CENTRIQ IN 65   SUPERSPOT	2700	3000	3500	4000	1557	21	90	SUPERSPOT 12°			IP20	330-1400	330-1402	
CENTRIQ IN 65   FLEX	2700	3000	3500	4000	1423	21	90	SPOT 14° - WIDE FLOOD 44°			IP20	330-1390	330-1392	
CENTRIQ IN 83	2700	3000	3500	4000	3450	36	90	SPOT 20°	MEDIUM 32°	WIDE FLOOD 54°	IP20	330-1450	330-1452	
CENTRIQ IN 83   SUPERSPOT	2700	3000	3500	4000	1843	27	90	SUPERSPOT 12°			IP20	330-1470	330-1472	
CENTRIQ IN 83   FLEX	2700	3000	3500	4000	1423	21	90	SPOT 14° - WIDE FLOOD 44°			IP20	330-1460	330-1462	




POWER

**21 - 36 WATT**


IP International Protection

**IP20**


INSTALLATION

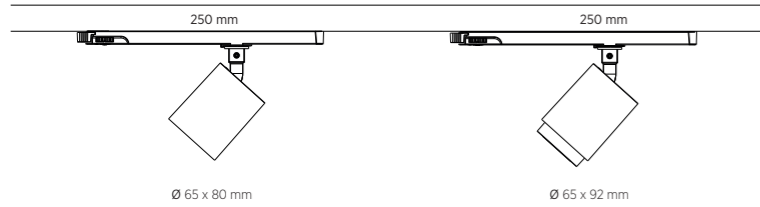

COLOR TEMPERATURE CCT



BEAMWIDTH



COLOR ADAPTER



COLOR

25 PROLICHT COLORS



RAL Classic or any other color on request


**POSSIBLE CONTROLS**

ON/OFF




OTHER ACCESSORIES ON [WWW.PROLICHT.AT/CENTRIQ IN](http://WWW.PROLICHT.AT/CENTRIQ IN)







CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX



CENTRIQ IN 83




CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX





**CENTRIQ IN | 2LOOK4 50**

DESCRIPTION	CCT				LUMEN MAX.	WATT	CRI	BEAM ANGLE - OPTIONS				IP	ART-N° ON/OFF	ART-N° DALI
CENTRIQ IN 65	2700	3000	3500	4000	2291	23	90	SPOT 24°	FLOOD 36°	WIDE FLOOD 52°	IP20	7-02388-00	7-02389-02	
CENTRIQ IN 65   SUPERSPOT	2700	3000	3500	4000	1557	21	90	SUPERSPOT 12°			IP20	7-02392-00	7-02393-02	
CENTRIQ IN 65   FLEX	2700	3000	3500	4000	1423	21	90	SPOT 14° - WIDE FLOOD 44°			IP20	7-02390-00	7-02391-02	
CENTRIQ IN 83	2700	3000	3500	4000	3450	36	90	SPOT 20°	MEDIUM 32°	WIDE FLOOD 54°	IP20	7-02394-00	7-02395-02	
CENTRIQ IN 83   SUPERSPOT	2700	3000	3500	4000	1843	27	90	SUPERSPOT 12°			IP20	7-02398-00	7-02399-02	
CENTRIQ IN 83   FLEX	2700	3000	3500	4000	1423	21	90	SPOT 14° - WIDE FLOOD 44°			IP20	7-02396-00	7-02397-02	



POWER  
**21 - 36 WATT**

IP International Protection  
**IP20**

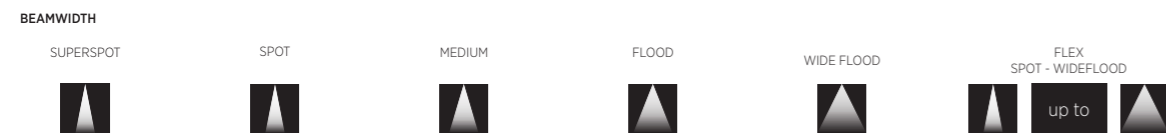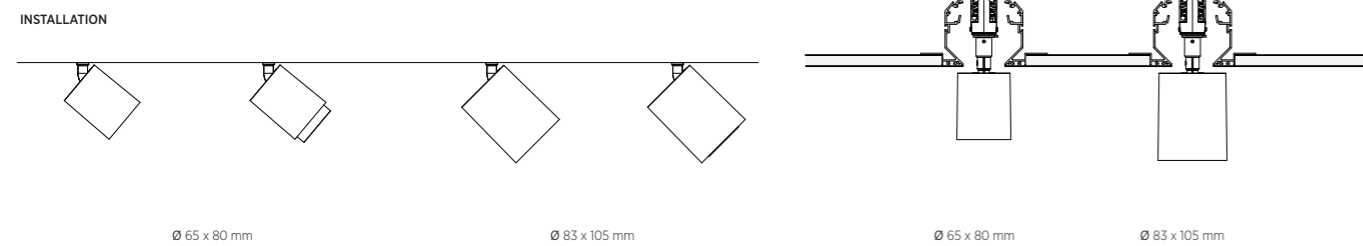

RAL Classic or any other color on request

**POSSIBLE CONTROLS**

ON/OFF



OTHER ACCESSORIES ON [WWW.PROLICHT.AT/CENTRIQ IN](http://WWW.PROLICHT.AT/CENTRIQ IN)





DISCOVER MORE ON

[WWW.PROLICHT.AT/CENTRIQ](http://WWW.PROLICHT.AT/CENTRIQ)





EDITOR Filippo Bettinzoli, PROLICHT  
PROLICHT GmbH | Austria  
6091 Neu-Götzens | Gewerbepark 9  
T +43 5234 33 499 | F + 43 5234 33 499 22  
marketing@prolicht.at | www.prolicht.at

TECHNICAL SUPPORT Romain Hoffmann

GRAPHIC DESIGN Tonia Wiedenmann

TEXT Julia Kopp, Philipp Juen

PRODUCT PHOTOS Armin Kuprian

PRODUCT RENDERINGS Aurel Petic

EDITION Spring 2022



 FOLLOW US ON  
INSTAGRAM

[WWW.PROLICHT.AT](http://WWW.PROLICHT.AT)