



2LOOK4 50
SIMPLY ELEGANT

2LOOK4 50 CATALOGUE | AUGUST 2023
ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated. All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at

PROLICHT MAKES A DIFFERENCE

If you promise your demanding clients bespoke, high-tech, quality products, you can't have them made just anywhere. We manufacture our products where the best trained technicians, engineers and designers find themselves at home: right in the middle of the Tyrolean Alps.

At the end of the day, it is their skill that makes a difference. And it is their expertise that has made PROLICHT one of the world's most successful premium manufacturers of architectural lighting concepts. Sustainably produced and custom made in Europe.







YOUR PROJECT
MAKES YOUR PRODUCT



MECHANICAL CONNECTION

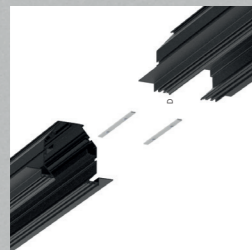


TRACK POWER FEED CONNECTION




CUTABLE BLACK PLASTIC COVER



3-TRACK NECESSARY (CHAPTER: ACCESSORY)



A: Opening width | B: Recess depth
C: Opening depth | D: Profile height
E: Width including mounting brackets

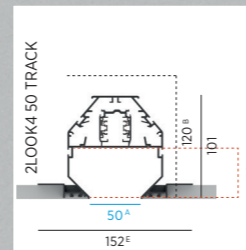





CENTRIQ IN

0-350°


0-90°



CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX


Ø 65 x 80 mm



CENTRIQ IN 83



CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX

Ø 83 x 105 mm



POWER

9 - 37 WATT


IP INTERNATIONAL PROTECTION

IP20


INSTALLATION

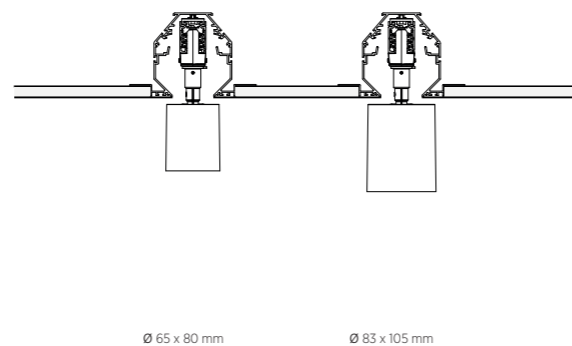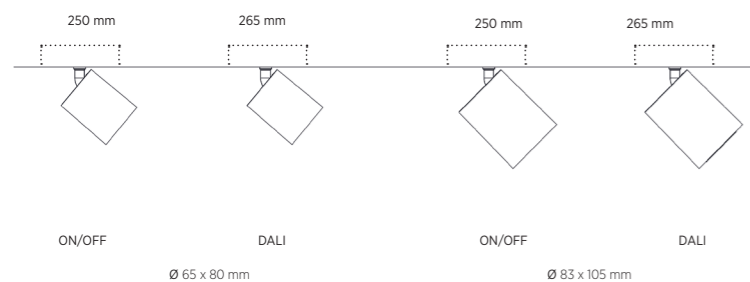

COLOR TEMPERATURE CCT

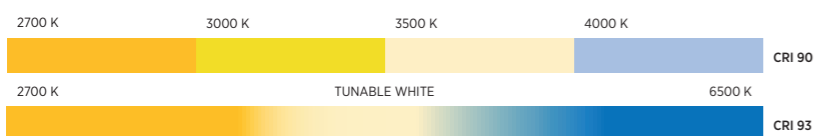

BEAMWIDTH



COLOR ADAPTER



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

CENTRIQ IN 65

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE				ART.-N° ON/OFF	ART.-N° DALI
	2700	3000	3500	4000	2291	23	90	IP20	SPOT 24°	FLOOD 36°	WIDE FLOOD 52°		7-02388-00	7-02389-02
SUPERSPOT	2700	3000	3500	4000	1554	21	90	IP20	SUPERSPOT 12°				7-02392-00	7-02393-02
FLEX	2700	3000	3500	4000	1421	21	90	IP20	SPOT 14° - WIDE FLOOD 44°				7-02390-00	7-02391-02
	TUNABLE WHITE 2700 - 6500				1269	15	92	IP20	SPOT 18°	MEDIUM 34°	WIDE FLOOD 54°		•	7-02750-02
SUPERSPOT TW	TUNABLE WHITE 2700 - 6500				564	9	92	IP20	SUPERSPOT 12°				•	7-02751-02


CENTRIQ IN 85

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE				ART.-N° ON/OFF	ART.-N° DALI
FLEX	2700	3000	3500	4000	1421	21	90	IP20	SPOT 14° - WIDE FLOOD 44°				7-02396-00	7-02397-02
	TUNABLE WHITE 2700 - 6500				2907	36	93	IP20	SPOT 24°	MEDIUM 34°	WIDE FLOOD 54°		•	7-02752-02
SUPERSPOT	TUNABLE WHITE 2700 - 6500				569	9	92	IP20	SUPERSPOT 10°				•	7-02754-02
FLEX	TUNABLE WHITE 2700 - 6500				479	9	92	IP20	SPOT 14° - WIDE FLOOD 46°				•	7-02753-02
HIGH OUTPUT	2700	3000	3500	4000	4312	41	90	IP20	SPOT 24°	FLOOD 36°	WIDE FLOOD 54°		7-02765-00	7-02765-02

POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V



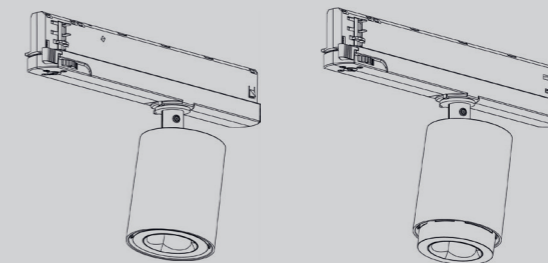

TRACK
Ø 65 mm x 80 mm

TRACK
Ø 65 mm x 92 mm

OIKO PRO IN

OIKO PRO IN

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE	ART-N° STANDARD	ART-N° DALI
	2700	3000	3500	4000	1724	20	90	IP20	WALLWASH	7-02761-00	7-02761-02
	2700	3000	3500	4000	1461	21	90	IP20	SPOT 14°	7-02763-00	7-02763-02
	2700	3000	3500	4000	1603	20	90	IP20	MEDIUM 34°	7-02755-00	7-02755-02
	2700	3000	3500	4000	1759	21	90	IP20	WIDE FLOOD 50°	7-02757-00	7-02757-02
	2700	3000	3500	4000	1932	20	90	IP20	VERY WIDE FLOOD 60°	7-02759-00	7-02759-02
	TUNABLE WHITE 2700- 6500				1213	15	90	IP20	WALLWASH	•	7-02762-02
	TUNABLE WHITE 2700 - 6500				1240	15	90	IP20	FLOOD 36°	•	7-02756-02
	TUNABLE WHITE 2700 - 6500				1070	15	90	IP20	WIDE FLOOD 50°	•	7-02758-02
	TUNABLE WHITE 2700 - 6500				1381	15	90	IP20	VERY WIDE FLOOD 62°	•	7-02760-02


POWER

15 - 21 WATT

IP INTERNATIONAL PROTECTION

IP20


INSTALLATION

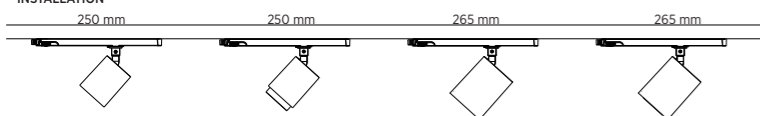

Ø 65 x 80 mm

Ø 65 x 92 mm

COLOR TEMPERATURE CCT



BEAMWIDTH



COLOR

25 PROLICHT COLORS




RAL Classic or any other special color on request

POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V



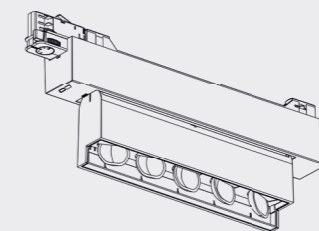

TRACK
395 x 50 mm | H: 130 mm

MAGIQ PLUS WALLWASH

MAGIQ PLUS WALLWASH

VERSION	CCT / K				LUMEN MAX.	WATT	CRI	IP	ART.-N° ON/OFF	ART.-N° DALI
	2700	3000	3500	4000	3151	46	90	IP20	330-0750	330-0752


POWER

46 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

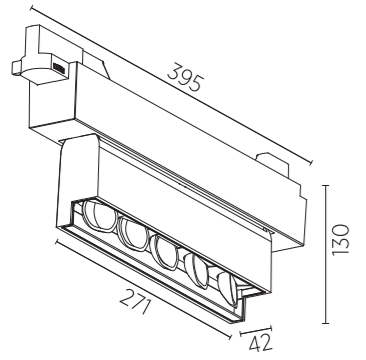

COLOR TEMPERATURE CCT




BEAMWIDTH

WALLWASH



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

POSSIBLE CONTROLS

ON/OFF  CASAMBI PUSH DIM 1-10V



2LOOK4 50 | COMPONENTS











ARTICLE	DESCRIPTION	DIMENSION mm	COLOR	ART.-N°
	HxO FEED 7x1,5mm ² L= 2000mm	Ø 12 H: 2000	1-29	100-617
	ALUMINIUM-PROFILE per meter	1000 x 50 H: 101	1-29	140-0203
	3-TRACK	1000 x 32 H: 38 2000 x 32 H: 38 3000 x 32 H: 38	BLACK	11-00904 11-00905 11-00906
	CAP PROFILE	1000 x 64 H: 14	BLACK	140-0201
	END CAP	1 x 94 H: 101	BLACK	140-0202
	LINEAR COUPLER	85 x 80 H: 5		140-0204
	SPACER	32 x 32 H: 11		140-0209
	PROLICHT 3 - STANDARD ADAPTER inc. strain relief		BLACK	800-1301
	PROLICHT 3 - DALI ADAPTER inc. strain relief		BLACK	800-1304
	LINEAR CONNECTOR		BLACK	11-00965



PHOTO | ARMIN KUPRIAN


OIKO PRO IN & CENTRIQ IN + TRACK | COLOR 02 BLACK VELVET

WWW.PROLICHT.AT

CONFIGURATION MAKES A DIFFERENCE

Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.

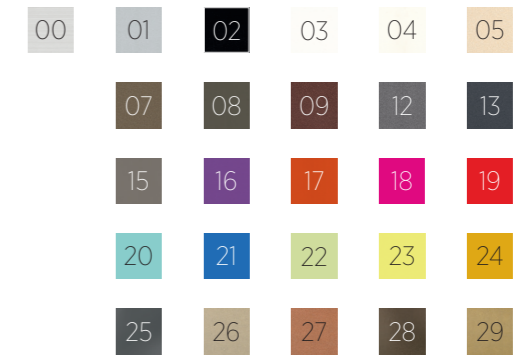

RAL Classic or any other special color on request



MAKE IT YOURS!

CONFIGURE ONLINE:
WWW.PROLICHT.AT/2LOOK4

DISCOVER MORE ON
WWW.PROLICHT.AT/2LOOK4



SANDRO MIAMI, USA | ARCHITECT: SMCP, PARIS | LIGHT PLANNING: OWL STUDIO | PHOTO: ALEX TARALANO



EDITOR Filippo Bettinzoli, PROLICHT
PROLICHT GmbH | Austria
6091 Neu-Götzens | Gewerbepark 9
T +43 5234 33 499 | F + 43 5234 33 499 22
marketing@prolicht.at | www.prolicht.at

TECHNICAL SUPPORT Romain Hoffmann

GRAPHIC DESIGN Tonia Wiedenmann

TEXT Julia Kopp

PRODUCT PHOTOS Armin Kuprian

PRODUCT RENDERINGS Aurel Petic, viewture.media, MOZING STUDIO

EDITION august 2023



 FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT