
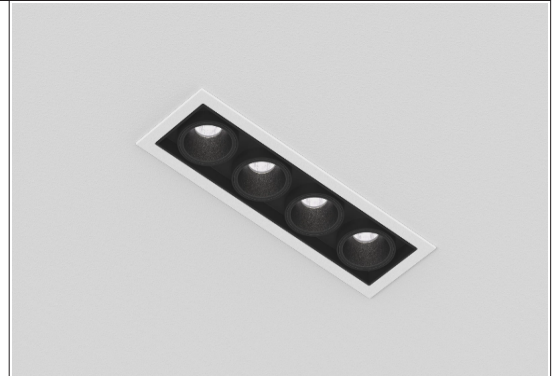


MAGIQ

03 Crystal white (01-32)

02 Black Velvet (01-32)



ARTICLE NUMBER 220-0735

1050 mA IP20

MOUNTING

Mounting location: Ceiling
Type: Recessed

ELECTRICAL

Control gear needed: Yes
Control gear included: No
Dimming: Depending on driver

DIMENSION

Length/Width: 145mm /45mm
Height: 64 mm
Cutout Length/Width: 138 mm/38 mm
Min. recessed depth: 100 mm

LIGHT

Adjustability: fixed
Light calculation: Direct
FWHM / Beam Angle: 8°
Beam width: Super Spot: 8°
Frame Color: Black frame

LAMP DESCRIPTION

Lamp type: LED
Total power: 13 W
Power loss ballast: 1.2W
Luminous flux of the light source: 1020 lm
Luminous flux of the luminaire: 764 lm
Colour rendering index (CRI): 90
MacAdam: 3
LED colour direct: 3500K


ORDER NUMBER

220-0735 03 02 35 11 02

TECHNICAL DESCRIPTION

Recessed spotlight (Aluminium die-cast); aluminum coated for best reflection; highly reflective faceted reflector; Microfaceted, aluminum-coated reflector; Precision reflector for accentuation; passive cooling through optimized heat sink; powder-coated die-cast body; Snap springs for concrete and hollow walls; Concrete installation housing available as accessory.; 2 powder-coated color options; RAL colors on request; Dimmability depends on the ballast; CRI > 90; MacAdam: 3; 80,000 hours lifespan; directly emitting; Light source can be replaced by professional staff.; complies with EN 60598-1; IP protection type IP20; Electrical Protection Class 3; Height: 64.00 mm; Length: 145.00 mm; Width: 45.00 mm

Polar Curve

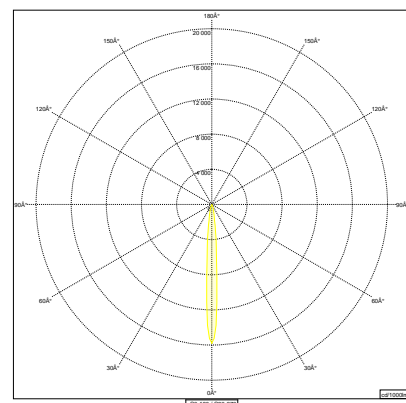

Measurement based on the color white



Date: 7/16/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

Accessories

#	Article Number	Product Description	Img
1	44-01661-M	Treiber 42W 450-1100mA 6-42V MATTER	

Date: 7/16/2024


We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at


Set consists of 2 articles

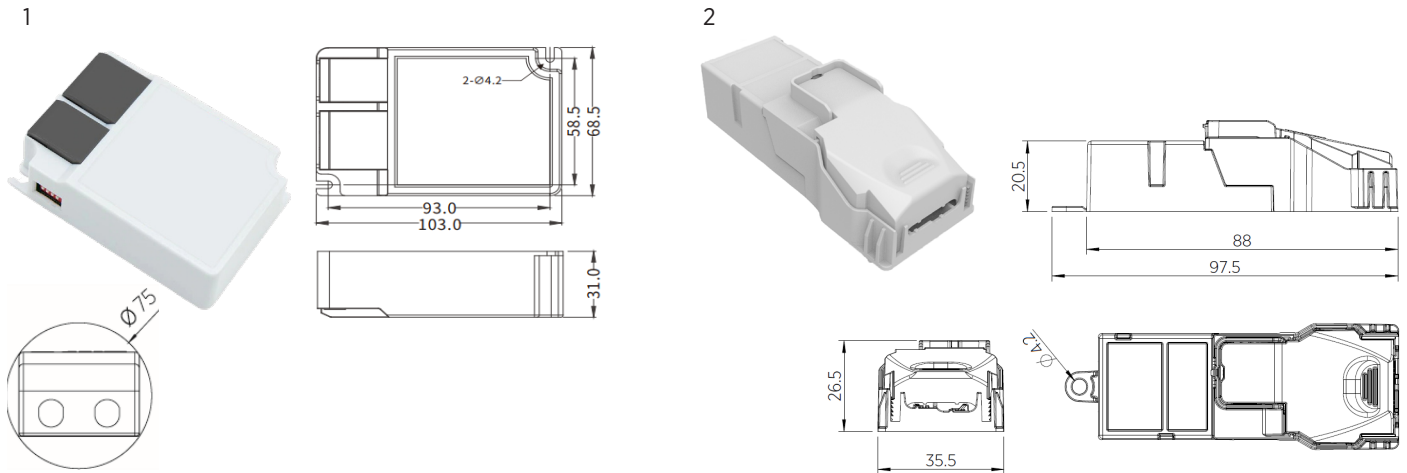

Order number:	44-01661-M
Control:	MATTER
Dimensions LxWxH 1:	103 x 68,5 x 31 mm
Dimensions LxWxH 2:	74 x 30 x 21 mm
Minimum cutout diameter:	75 mm
WLAN frequency:	2,4 GHz

Constant current mA	Forward voltage V	Maximum power W
1050	6 - 40	42

Mains voltage:	220 - 240 V
Frequency:	50/60 Hz
SELV:	Yes
Protection class:	2
Degree of protection:	IP20
Maximum possible efficiency:	95%
Through-wiring possible:	No

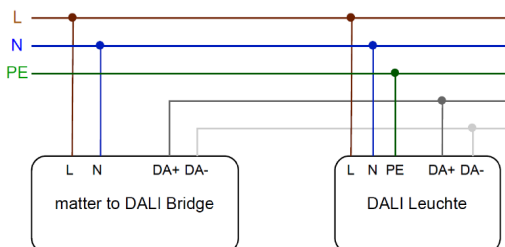

Misprints excepted. Technical changes are as far as they contribute to the improvement of the product are possible at any time!
Further details available on request!

Date: October 10, 2022

We reserve the right to make technical changes without prior notice.
PROLICHT GmbH | Österreich | 6091 Neu-Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at