



Marketing Agency

Marketing Agency

Overview

Article Number	Product name	#
0815-086	HYPRO 40	1
220-0735	MAGIQ	1
0815-061	SUPER-G SLIM	1

HYPRO 40

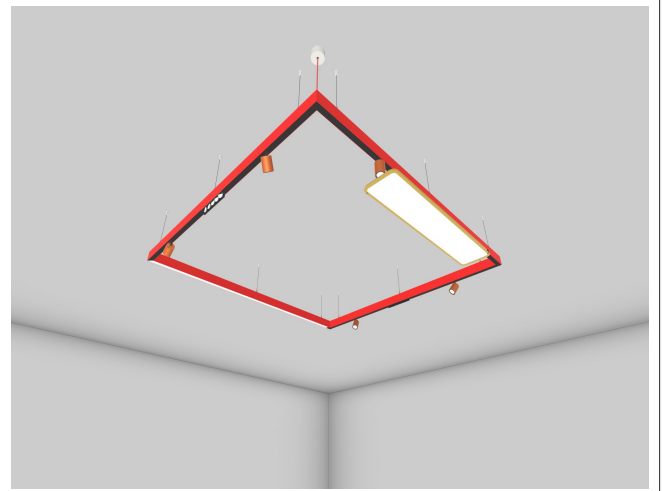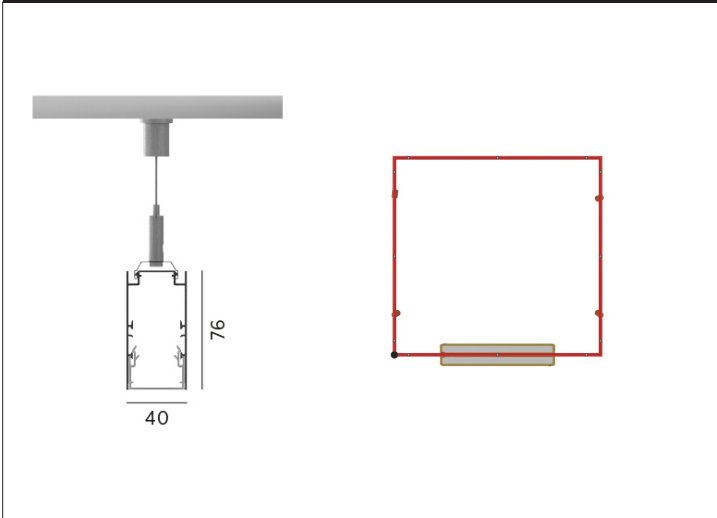

HYPRO 40

IP20 19 03 NA 29-29 11-27 2000

MOUNTING

Type: Suspended
Mounting location: Ceiling

ELECTRICAL

Voltage: 220-240V
Frequency: 50-60Hz
Dimmer: DALI
Control gear included: Yes

DIMENSION

Profile length (total): 8750 mm

WEIGHT

Net: 19.064 Kg

LIGHT

Light calculation: wallwasher, direkt
FWHM / Beam Angle: -1°,108°,108°,90°,38°


Lamp Description

Lamp type: LED
Total power: 263.8 W
Power loss ballast: 24 W
Luminous flux of the light source: 30266 lm
Luminous flux of the luminaire: 22323 lm
LED color direct: 3000K
CRI: 90
MacAdam: 3

TECHNICAL DESCRIPTION

Suspended profile system made of aluminium, powder-coated in one of the 29 Prolight standard colours; aluminium end caps without visible screws; powder-coated in one of the 29 Prolight standard colours; suspension with stainless steel cables (2000 or 6000mm long) can be mounted on profile without tools by means of spring clip and positioned as required; ceiling attachment for cable suspension made of aluminium powder-coated in one of 29 Prolight standard colours; special clear cover with faceted high reflection Aluminium vapourised reflector (RICO) with precise beam characteristic and cut off specially optimised for workstations of different sizes and ceiling heights; LED replaceable by authorised specialists; light colour 2700K, 3000K, 3500K or 4000K; binning 3-steps MacAdam ellipse; DALI dimmable (DALI-2) or non-dimmable control gear; electrical connection via 3 or 5-pole plug-in terminal suitable for through-wiring, protection class IP20; SK 1; according to IEC 62471 (photobiological safety) risk group RGO - no risk; cylindric aluminium die cast canopy power-coated in one of 29 Prolight standard colours feeder cable available in 5 colours; dimensions width x height 38x76mm.

LIGHT CALCULATION

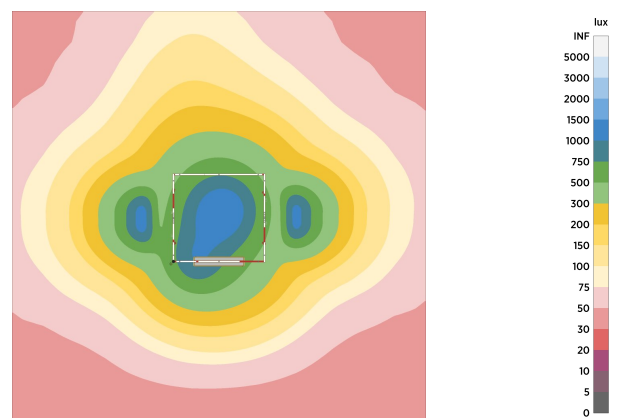

Measurement based on the color white



Date: 7/16/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

Part List



#	Article Number	Product Description	Colour
2	440-0001-19	2099mm IDAHO 40/HYPRO 40 aluminium profile SUS per meter 76x39mm body: KISSING APHRODITE (19)	
1	81086	507mm cover IDAHO 40/ HYPRO black	
1	81086	95mm cover IDAHO 40/ HYPRO black	
1	81086	642mm cover IDAHO 40/ HYPRO black	
1	81051-LF	IDAHO 40/HYPRO 40 L-Coupler feed EB / AB / HL	
12	440-0002-03-01	IDAHO 40/HYPRO 40 installation clips SUS fixation: CRYSTAL WHITE (03) Suspension cable: 2000 mm (01)	
1	81031-03-04	feed cloth coated cable 5x0,75mm ² L=2000mm body: CRYSTAL WHITE (03) Suspension cable: 2000 mm / red (04)	
6	81052	IDAHO 40/HYPRO 40 cable clip	
2	440-0001-19	2000mm IDAHO 40/HYPRO 40 aluminium profile SUS per meter 76x39mm body: KISSING APHRODITE (19)	
4	81086	423mm cover IDAHO 40/ HYPRO black	
1	81086	476mm cover IDAHO 40/ HYPRO black	
1	81086	466mm cover IDAHO 40/ HYPRO black	
2	7-02806-02-30-02	MAGIQ Wallwash insert Hypro 40 L=760mm LED DALI 2260lm 3000K 31.3W CRI90 Frame: black (02) 3000 K LED direct (30)	
1	81086	456mm cover IDAHO 40/ HYPRO black	
1	81086	486mm cover IDAHO 40/ HYPRO black	
1	81086	69mm cover IDAHO 40/ HYPRO black	
1	7-02657-02-30-01	Idaho/Hypro40 LED insert L=705mm LED DALI 1548lm 3000K 16.3W CRI90 3000K LED direct (30) Diffuser: Opal (01)	
1	7-02673-02-30-01	Idaho/Hypro40 LED insert L=1408mm LED DALI 3096lm 3000K 32.6W CRI90 3000K LED direct (30) Diffuser: Opal (01)	

#	Article Number	Product Description	Colour
1	81082	2165mm diffuser IDAHO 40/ HYPRO white/diffus per m	
4	81055-WC-19	L-connector SF/SUS body: KISSING APHRODITE (19)	
1	7-02592-02-29-29-30-22	HADI-M SU insert Hypro40 LED DALI 4269lm 3000K 37.3W CRI90 body: JAZZ GOLD (29) end cap: JAZZ GOLD (29) Power feed: 2000 mm / black (22) 3000 K LED direct (30)	 
5	7-02502-02-11-27-30-22-02	CENTRIQ IN 65 Hypro 40 insert LED DALI 1778lm 3000K 23.0W CRI90 fixation: MILK & CHOCOLATE (11) head: COPPER MINE (27) 3000 K LED direct (30) Beamwidth: Spot (22) Optic: spread lens (02)	 

MAGIQ

03 Crystal white (01-32)

02 Black Velvet (01-32)

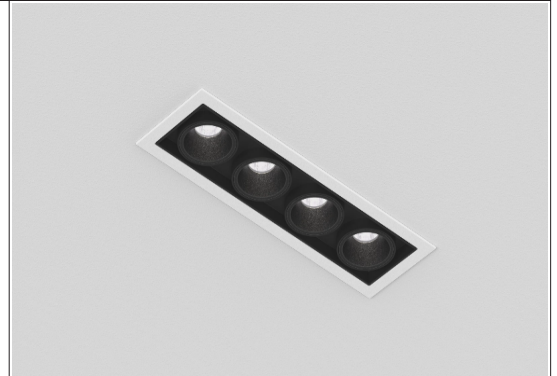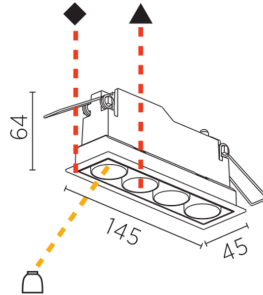

ARTICLE NUMBER 220-0735

1050 mA IP20

MOUNTING

Mounting location: Ceiling
Type: Recessed

ELECTRICAL

Control gear needed: Yes
Control gear included: No
Dimming: Depending on driver

DIMENSION

Length/Width: 145mm /45mm
Height: 64 mm
Cutout Length/Width: 138 mm/38 mm
Min. recessed depth: 100 mm

LIGHT

Adjustability: fixed
Light calculation: Direct
FWHM / Beam Angle: 8°
Beam width: Super Spot: 8°
Frame Color: Black frame

LAMP DESCRIPTION

Lamp type: LED
Total power: 13 W
Power loss ballast: 1.2W
Luminous flux of the light source: 1020 lm
Luminous flux of the luminaire: 764 lm
Colour rendering index (CRI): 90
MacAdam: 3
LED colour direct: 3500K


ORDER NUMBER

220-0735 03 02 35 11 02

TECHNICAL DESCRIPTION

Recessed spotlight (Aluminium die-cast); aluminum coated for best reflection; highly reflective faceted reflector; Microfaceted, aluminum-coated reflector; Precision reflector for accentuation; passive cooling through optimized heat sink; powder-coated die-cast body; Snap springs for concrete and hollow walls; Concrete installation housing available as accessory.; 2 powder-coated color options; RAL colors on request; Dimmability depends on the ballast; CRI > 90; MacAdam: 3; 80,000 hours lifespan; directly emitting; Light source can be replaced by professional staff.; complies with EN 60598-1; IP protection type IP20; Electrical Protection Class 3; Height: 64.00 mm; Length: 145.00 mm; Width: 45.00 mm

Polar Curve

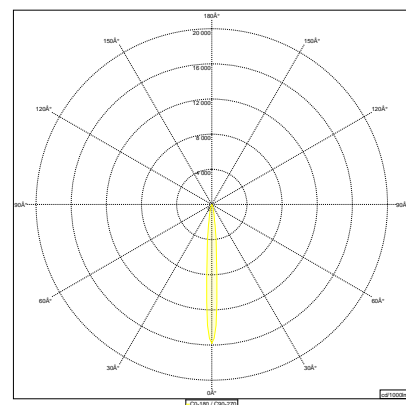

Measurement based on the color white




Date: 7/16/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

Accessories

#	Article Number	Product Description	Img
1	44-01661-M	Treiber 42W 450-1100mA 6-42V MATTER	

Date: 7/16/2024


We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbestraße 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at


Set consists of 2 articles

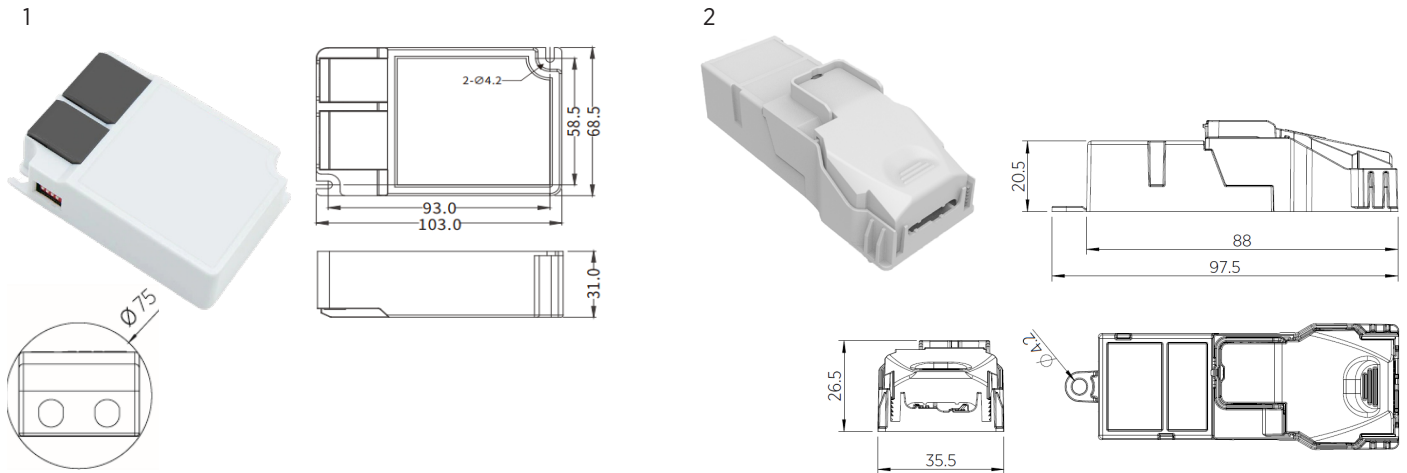

Order number:	44-01661-M
Control:	MATTER
Dimensions LxWxH 1:	103 x 68,5 x 31 mm
Dimensions LxWxH 2:	74 x 30 x 21 mm
Minimum cutout diameter:	75 mm
WLAN frequency:	2,4 GHz

Constant current mA	Forward voltage V	Maximum power W
1050	6 - 40	42

Mains voltage:	220 - 240 V
Frequency:	50/60 Hz
SELV:	Yes
Protection class:	2
Degree of protection:	IP20
Maximum possible efficiency:	95%
Through-wiring possible:	No


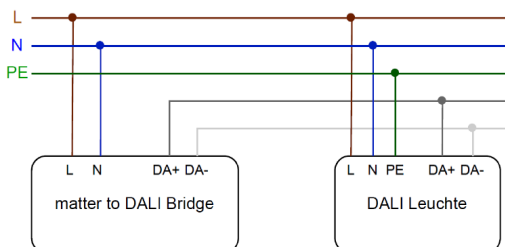


Misprints excepted. Technical changes are as far as they contribute to the improvement of the product are possible at any time!
Further details available on request!

Date: October 10, 2022

We reserve the right to make technical changes without prior notice.
PROLICHT GmbH | Österreich | 6091 Neu-Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

SUPER-G SLIM

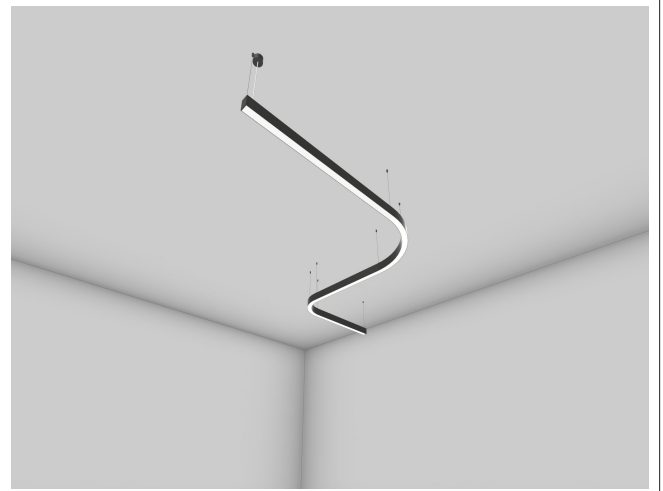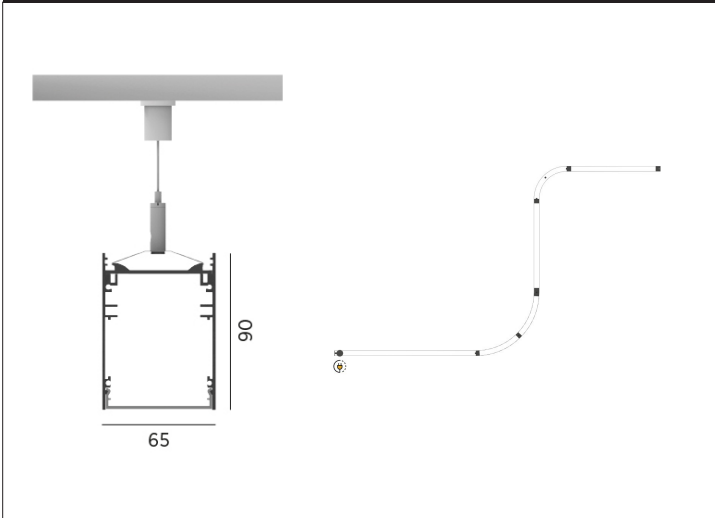

SUPER-G SLIM



MOUNTING

Type: Suspended
Mounting location: Ceiling

ELECTRICAL

Voltage: 220-240V
Frequency: 50-60Hz
Dimmer: Not dimmable
Control gear included: Yes

DIMENSION

Profile length (total): 5755.6 mm

WEIGHT

Net: 24.849 Kg

LIGHT

Light calculation: direkt/indirekt
FWHM / Beam Angle: 78°,78°,78°,78°


Lamp Description

Lamp type: LED
Total power: 192.6 W
Power loss ballast: 17.6 W
Luminous flux of the light source: 28980 lm
Luminous flux of the luminaire: 24730 lm
LED color direct: 3000K
LED color indirect: 3000K
CRI: 90
MacAdam: 3

TECHNICAL DESCRIPTION

Pendant luminaire made of aluminium profile, powder-coated in one of the 29 Prolight standard colours; suspension with stainless steel cables (2000 or 6000mm length) can be mounted to the profile without tools by means of spring clip and can be positioned as required; cover optionally with opal UV-stable diffuser made of PMMA with uniform light distribution or with UV-stable microprismatic made of PMMA with additional diffuser foil for reduction of luminance with homogeneous illumination; glare rating UGR = 19; VDU-compatible task luminaire according to DIN EN 12464-1, light colour 3000K or 4000K; binning 3-steps MacAdam ellipse; DALI dimmable or non-dimmable control gear; electrical connection via 3 or 5-pole plug-in terminal suitable for through-wiring, protection class IP20; SK 1; according to IEC 62471 (photobiological safety) risk group RGO - no risk;; tool-free, electrical connection via 3 or 5-pole plug-in terminal suitable for through-wiring; protection class IP20; SK 1; cylindric aluminium die cast canopy power-coated in one of 29 Prolight standard colours feeder cable available in 5 colours, dimensions width x height 65x90mm.

LIGHT CALCULATION

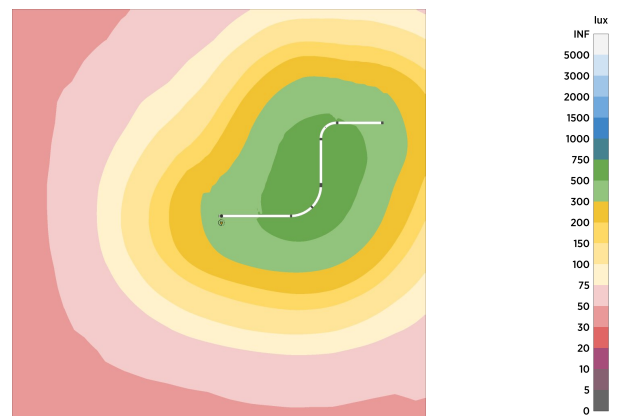

Measurement based on the color white









Date: 7/16/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9
T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

Part List

#	Article Number	Product Description	Colour
8	81043-02	SUPER-G SLIM SUS PS suspension 2000mm fixation: BLACK VELVET (02)	
1	100-112-02	Power feed 3x0,75mm ² L=2000mm - transparent cable body: BLACK VELVET (02)	
2	81041-V-02	SUPER-G SLIM SUS PS end cap packed packed end cap: BLACK VELVET (02)	
1	440-0720-02-30-02-30	SUPER G SLIM DIR/IND 1720 SU PS LED ON/OFF 7419lm 3000K 57.8W CRI90 body: BLACK VELVET (02) 3000K LED direct (30) Diffuser: Microprism (02) 3000 K LED indirect (30)	
1	440-0760-02-30-02-30	SUPER G SLIM DIR/IND 1550/90 SU PS LED ON/OFF 4946lm 3000K 38.5W CRI90 body: BLACK VELVET (02) 3000K LED direct (30) Diffuser: Microprism (02) 3000 K LED indirect (30)	
2	440-0700-02-30-02-30	SUPER G SLIM DIR/IND 1140 SU PS LED ON/OFF 4946lm 3000K 38.5W CRI90 body: BLACK VELVET (02) 3000K LED direct (30) Diffuser: Microprism (02) 3000 K LED indirect (30)	
1	440-0740-02-30-02-30	SUPER G SLIM DIR/IND 800/90 SU PS LED ON/OFF 2473lm 3000K 19.3W CRI90 body: BLACK VELVET (02) 3000K LED direct (30) Diffuser: Microprism (02) 3000 K LED indirect (30)	